


2

0

1

9

CARBON FRAME CATALOG

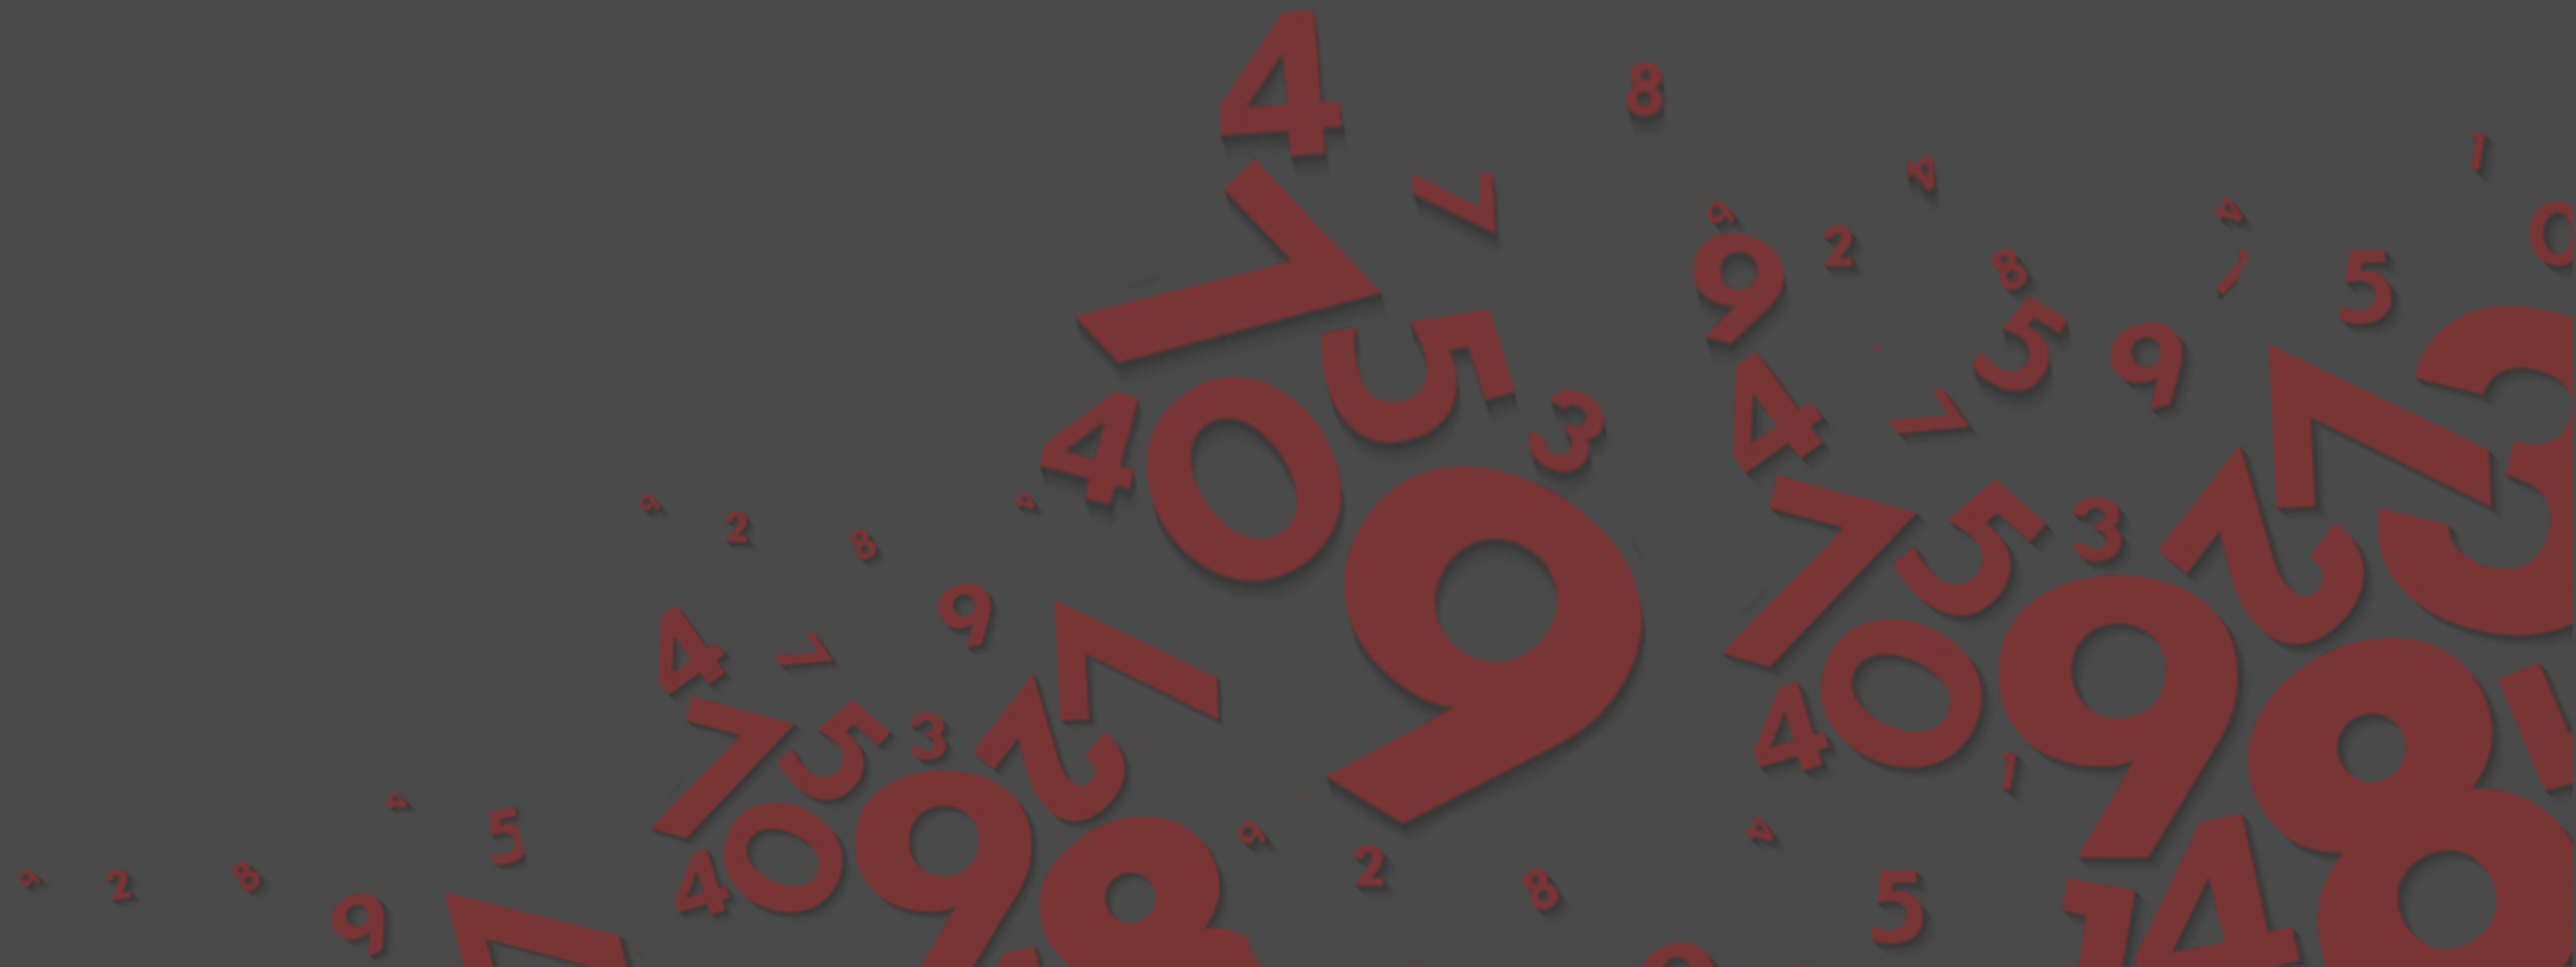

CONTENTS

E-Bike Frame-----1-8

Road Frame-----9-15

TT Frame----- 16

MTB Frame----- 17-21


MTB Suspension Frame-----22-26

Gravel Frame----- 27

EBM01

Full Carbon Hardtail EBIKE

Size Available	15/17/19
Head Tube	FSA NO.57
Seat Post	Ø31.6mm
Cable Routing	Internal Cable Routing
Travel	F 100mm
Tire Max	29"*2.35" 27.5"*3.0"
O.L.D	Axle Ø12*148mm
BATTERIE	Shimano E8010
DISPLAY	Shimano ANTRIEBSEINHEIT DU-E800
Crankset	FC-E8000 SM-CRE80 34T
Grade Available	B:1680g(For Size 17)

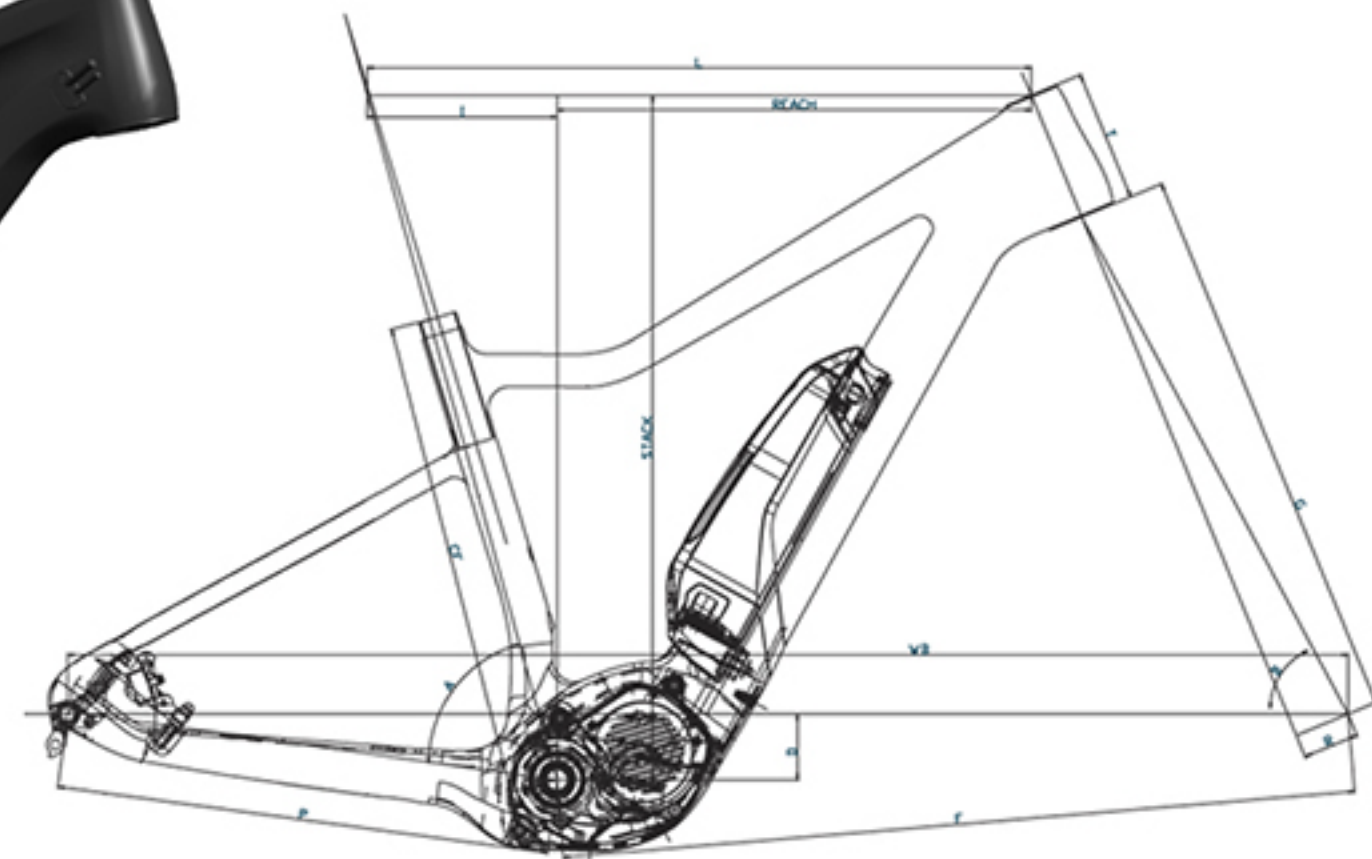


EBM01

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
15	380	580	170.2	74.5°	67.5°	697.2	450	110	60	51	511	511	409.8	1140.6
17	435	605	172.9	74.5°	67.5°	723.2	450	120	60	51	511	511	432.1	1166.7
19	485	625	175.5	74.5°	67.5°	744.3	450	130	60	51	511	511	449.5	1187.9

EBM02

Full Carbon E-Suspension frame

Size Available	16/18/20
Head Tube	FSA NO.57
Seat Post	Φ31.6mm
Cable Routing	Internal cable Routing
Travel	F 150mm R 150mm
Tire Max	29*2.35" 27.5*3.0"
O.L.D	Axle Φ12*148mm
Battery	Darfon Battery-3D-E4C0C-001 (504wh,Horizontal,with mount)
DISPLAY	Shimano ANTRIEBSEINHEIT DU-E8000
Crankset	FC-E8000 SM-CRE80 34T
Rear Shock	SRAM:Delux-rlr-185x55mm
Grade Available	B:3350g(For size 18)

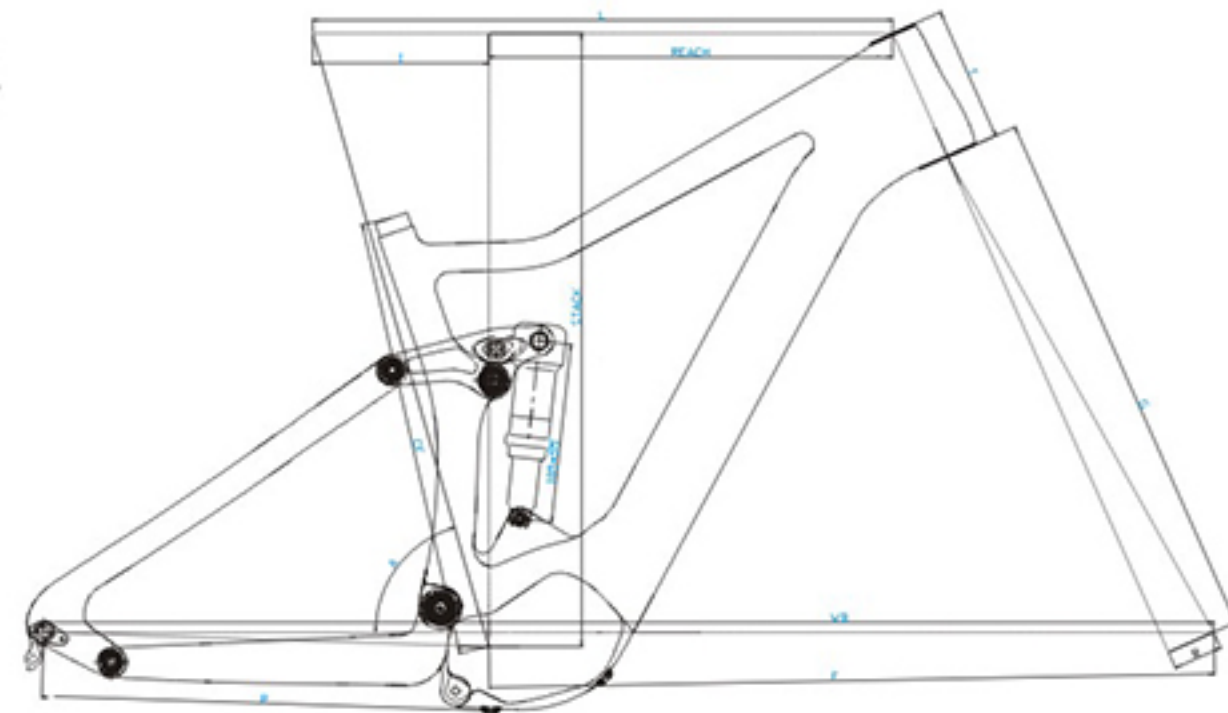


EBM02

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
16	406	590	176.5	74	66	737	460	130	15	51	561	626.4	418.2	1201.6
18	457	610	182	74	66	759.3	460	140	15	51	561	637.7	427.9	1219.6
20	508	630	185.6	74	66	779.4	460	150	15	51	561	644.7	447.5	1239

EBM03

Full Carbon E-Suspension frame

Size Available	16/18/20
Head Tube	FSA NO.57
Seat Post	Φ31.6mm
Cable Routing	Internal cable Routing
Travel	F 150mm R 150mm
Tire Max	29*2.35" 27.5*3.0"
O.L.D	Axle Φ12*148mm
battery	bafang M600(MM G520-with downtube battery)
Crankset	34T
REAR Shock	SRAM:Delux-rlr-185x55mm
Grade Available	B:3350g(For size 18)

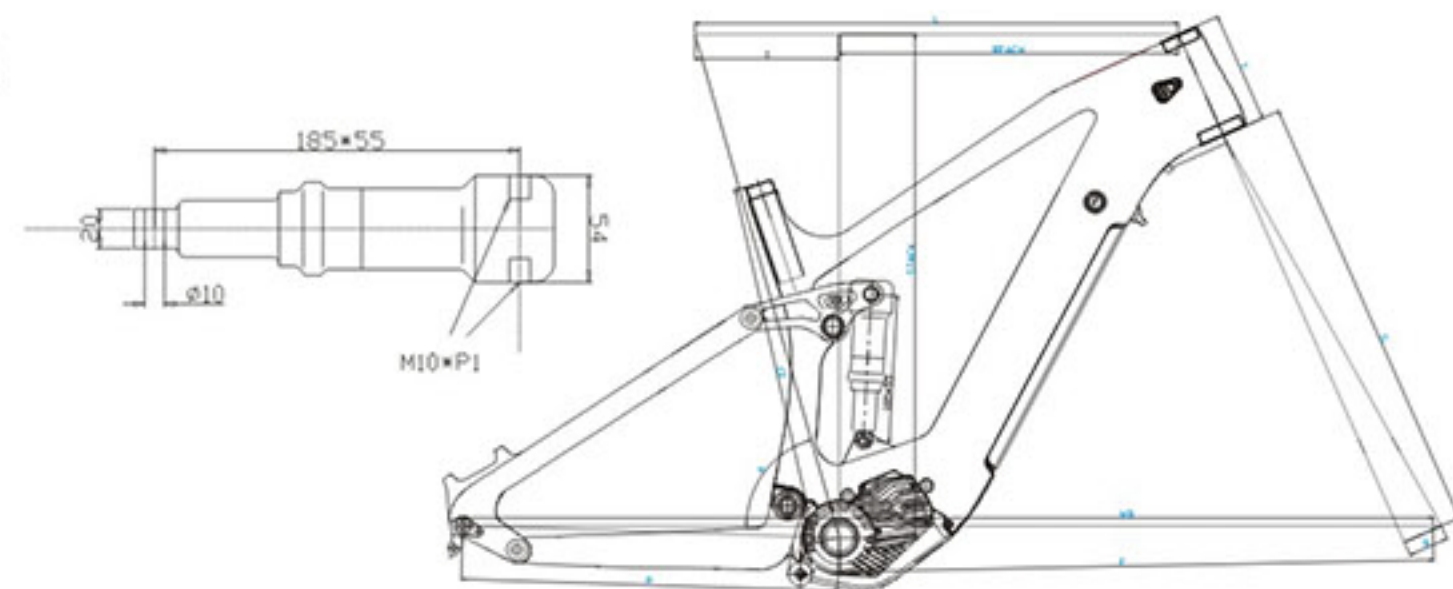


EBM03

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
16	406	590	176.5	74°	66°	737	475	130	15	51	561	626.4	418.2	1216.6
18	457	610	182	74°	66°	759.3	475	140	15	51	561	637.7	427.9	1234.6
20	508	630	185.6	74°	66°	779.4	475	150	15	51	561	644.7	447.5	1254

EBM04**Full Carbon E-MTB frame**

Size Available	16/18/20
Head Tube	FSA NO.57
Seat Post	Φ31.6mm
Cable Routing	Internal cable Routing
Travel	F 100mm
Tire Max	29*2.35" 27.5*3.0"
O.L.D	Axle Φ12*148mm
Battery	Darfon Battery-3D-E4C0C-001 (504wh,Horizontal,with mount)
DISPLAY	Shimano ANTRIEBSEINHEIT DU-E8000/E6100
Crankset	FC-E8000 SM-CRE80 34T
Grade Available	B:1850g(For size 18)

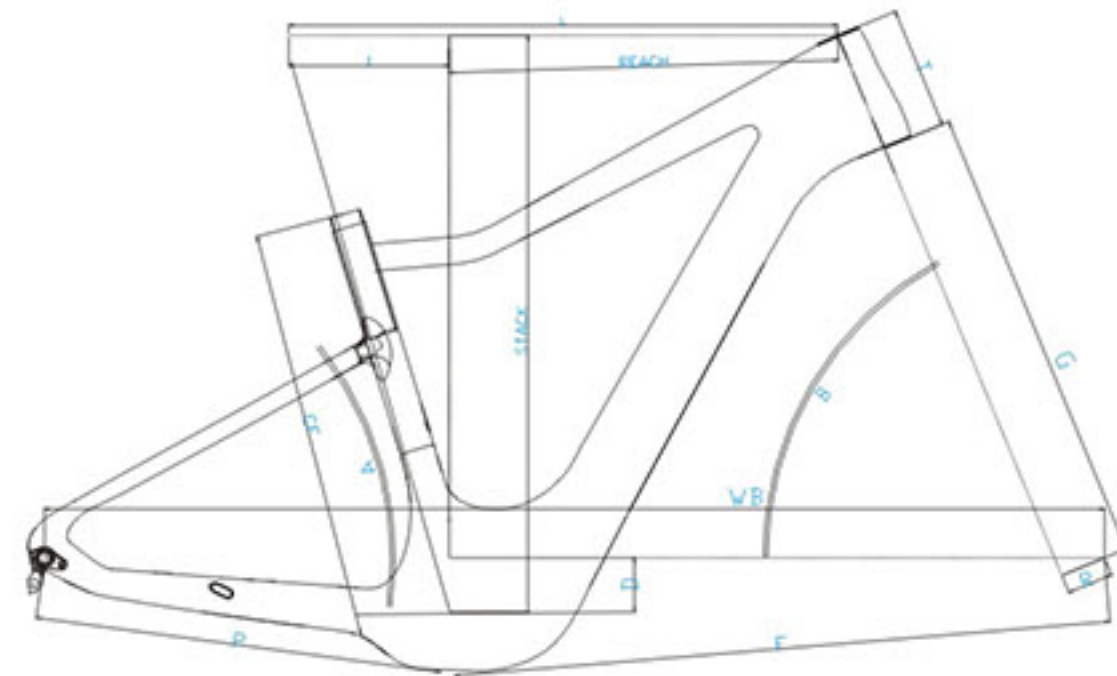
**EBM04**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
16	405	585	174.2	74.5°	67.5°	706.2	450	125	60	51	511	624.2	409.8	1140.6
18	455	605	176.7	74.5°	67.5°	725.5	450	135	60	51	511	637.3	428.3	1168.6
20	505	625	178.5	74.5°	67.5°	744.3	450	145	60	51	511	642.7	449.5	1187.9

EBM05

Full Carbon Monocoque Frame

Size Available	15.5"/17.5"/19"/21"
Head Tube	1 1/8"-1 1/2"
Seat Post	Ø31.6mm
Bottom Bracket	BB92
Cable Routing	Internal Cable Routing(For RB/FD/RD ¹)
Grade Available	B:2000g(For Size 17.5"/BB92)
Travel	F 120mm R 110mm
Tire Max	29"*2.35"
O.L.D	TA Ø12*142mm or TAØ12*148mm

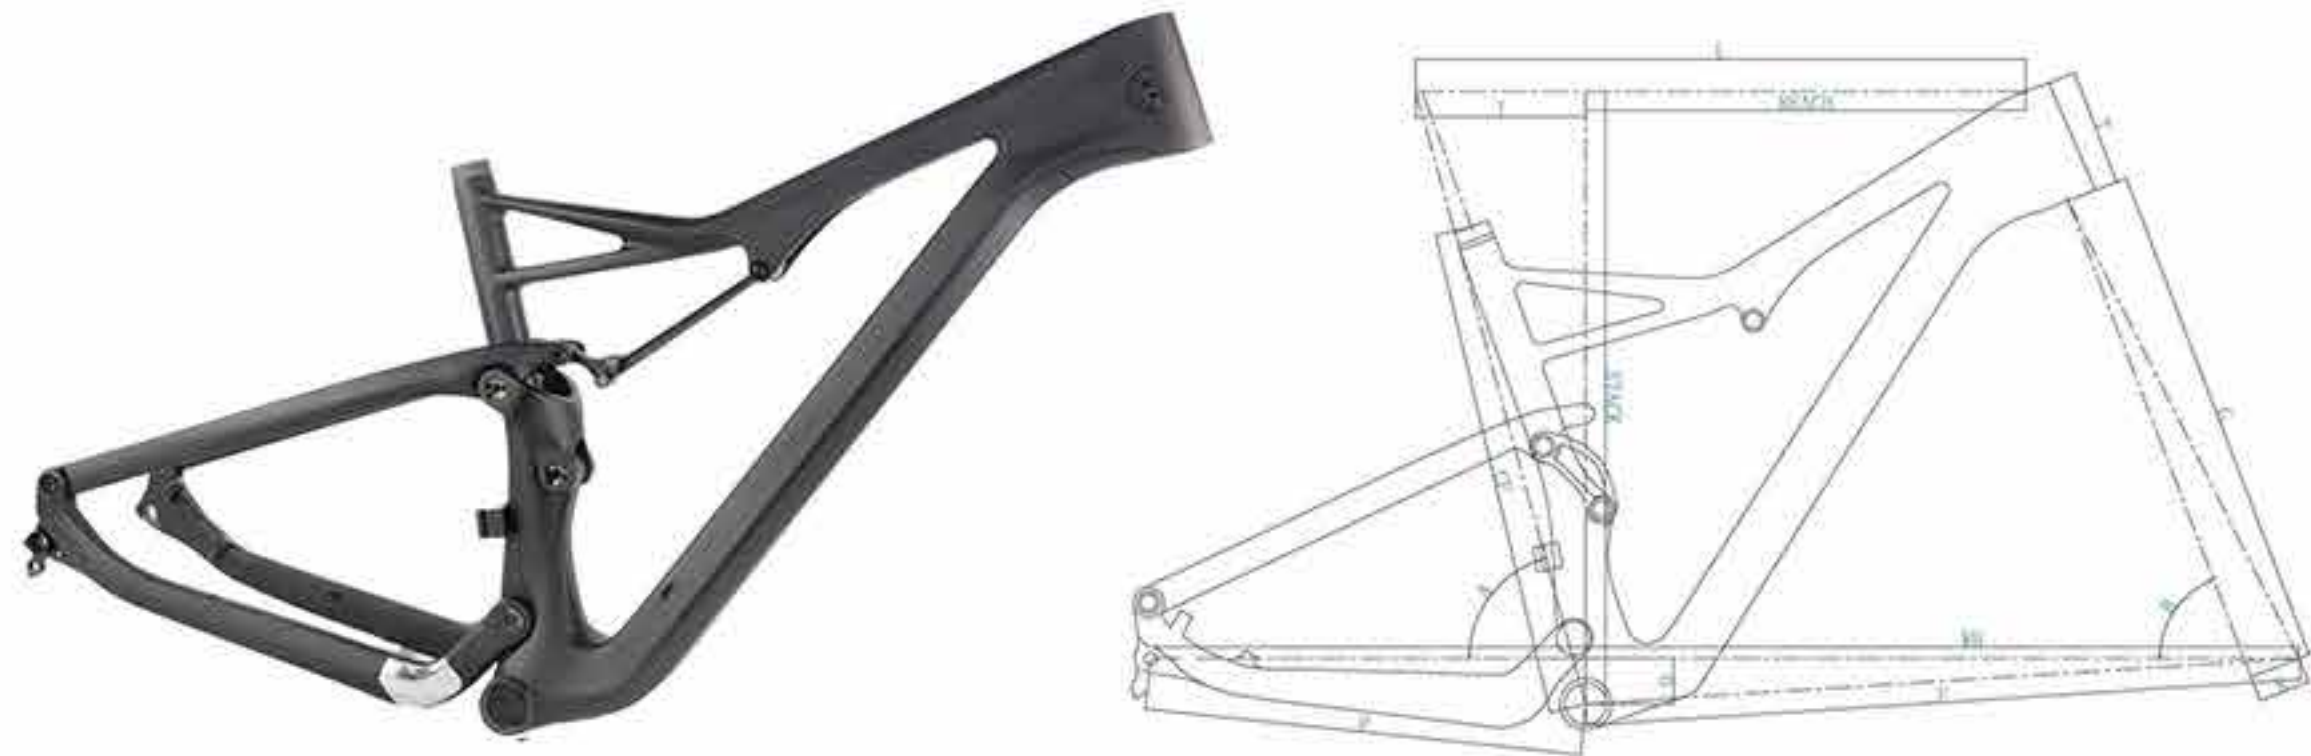


EBM05

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
15.5	395	560.5	173.4	73.6°	68.1°	664.7	440	95	39	51	520.4	590.4	387.1	1101.9
17.5	450	587.5	174.8	73.6°	68.1°	692.1	440	100	39	51	520.4	595.1	412.7	1129
19	483	602.6	179	73.6°	68.1°	708.8	440	115	39	51	520.4	609.3	423.6	1146.1
20.5	520	632.7	181.9	73.6°	68.1°	740	440	125	39	51	520.4	619	450.9	1177.3

EBM06**Full Carbon Suspension EBIKE**

Size Available	S/M/L
Head Tube	FSA N0.57
Seat Post	Ø31.6mm
Cable Routing	Internal Cable Routing
Travel	F 150mm R150mm
Tire Max	29"*2.35" 27.5"*3.0"
O.L.D	Axle Ø12*148mm
BATTERIE	Shimano E8010
DISPLAY	Shimano ANTRIEBSEINHEIT DU-E8000
Crankset	FC-E8000 SM-CRE80 34T
REAR Shock	185*55

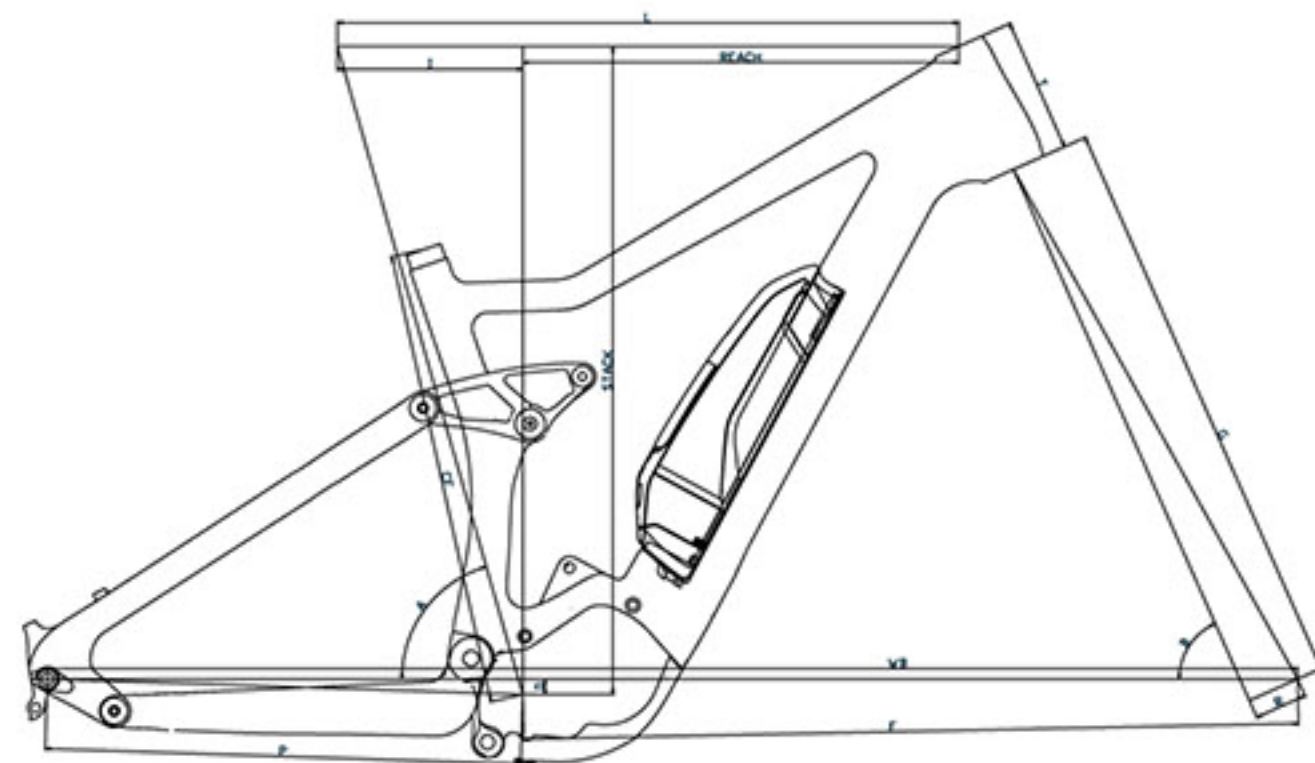**EBM06**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	400	585	176.8	74°	66°	732	460	120	15	51	561	616.4	408.2	1191.6
M	440	601	179.4	74°	66°	749.3	460	130	15	51	561	625.5	412.5	1209
L	490	625	182	74°	66°	774.9	460	140	15	51	561	634.7	443	1234.5

EBR1

Full Carbon E-road Frame

Size Available 470/500/530/550/580

Head Tube 11/2"-11/2"

Seat Post SP051

Tire Max 700*32C

O.L.D TA 142 *Φ12mm


Assistance BAFANG M800

Disc brake Flat mount

Cable Routing Internal cable Routing
(For RB/FD/RD)

Chainwheel 53-39T/50-34T

Grade Available B:1550g(For size 530)

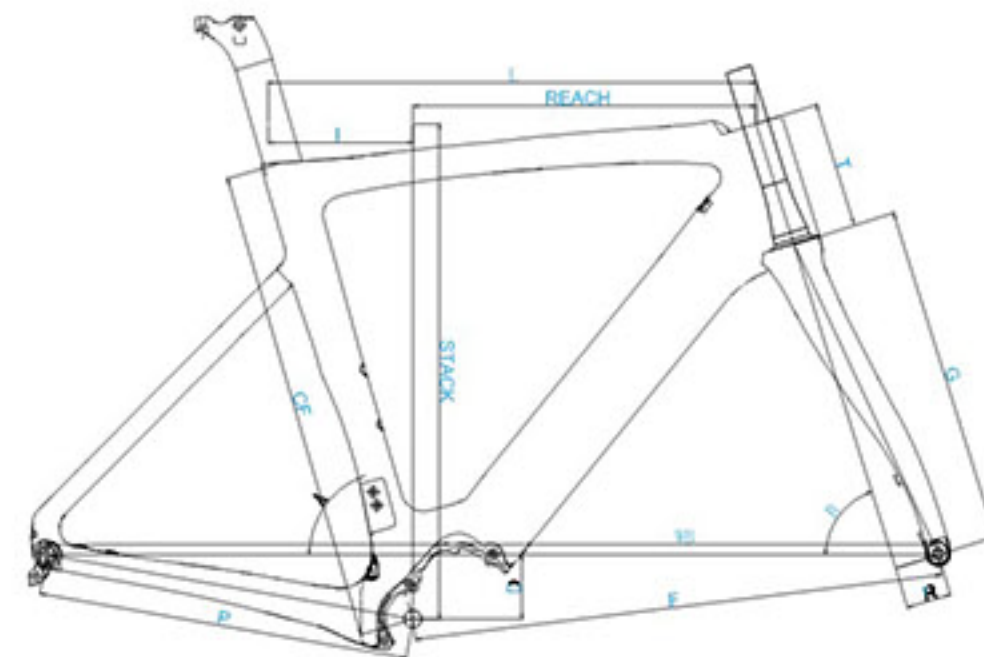**EBR1**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	470	520	138	74.5°	71.5°	582	415	130	72	50	380	531	370	982.8
500	500	525	138	74°	72°	582	415	130	72	50	380	531	370	982.8
530	530	545	159.7	73.7°	72.5°	596	415	140	72	50	380	553	382	996.1
550	550	560	161.9	73°	73°	605	415	160	72	50	380	572	389	1001.8
580	580	590	174.4	72.5°	73.5°	620	415	180	72	50	380	615	397	1009.8

EBR2

Full Carbon E-road Frame

Size Available 470/500/530/550/580

Head Tube 1 1/2"-1 1/2"

Seat Post SP051

Tire Max 700*32C"

O.L.D TA 142*Φ12mm


Assistance Fazua,250w,25km/h

Disc brake Flat mount

Cable Routing Internal cable Routing
(For RB/FD/RD)

Chainwheel 53-39T/50-34T

Grade Available B:1550g(For size 18)

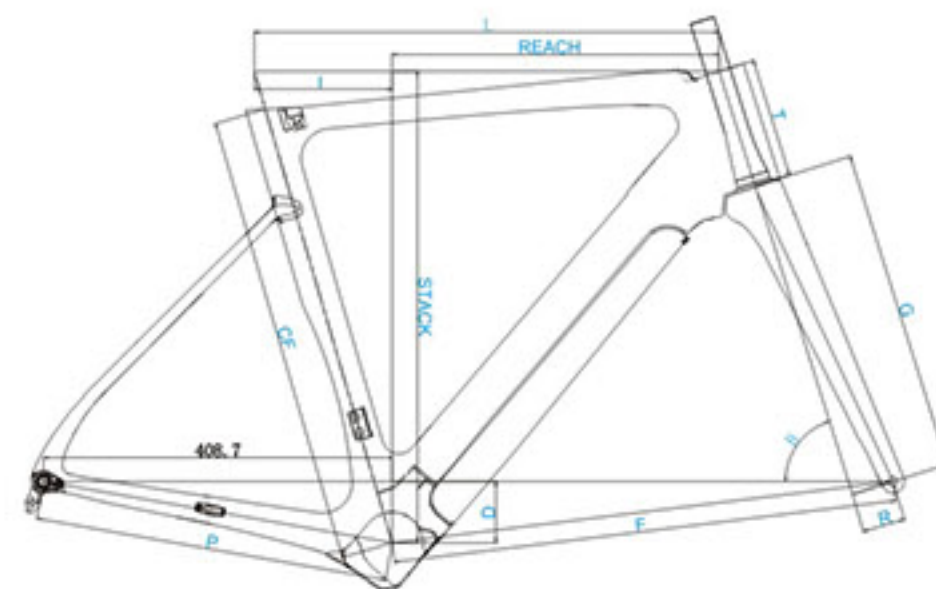

EBR2

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	470	520	138	74.5°	71.5°	582	415	130	72	50	380	531	370	982.8
500	500	525	138	74°	72°	582	415	130	72	50	380	531	370	982.8
530	530	545	159.7	73.7°	72.5°	596	415	140	72	50	380	553	382	996.1
550	550	560	161.9	73°	73°	605	415	160	72	50	380	572	389	1001.8
580	580	590	174.4	72.5°	73.5°	620	415	180	72	50	380	615	397	1009.8

R01

Full Carbon Monocoque Frame

Size Available 49/51/53/55/57

Head Tube 1 1/8"-1 1/2"

Seat Post Ø27.2mm

Bottom Bracket BSA BB86

Cable Routing Internal Cable Routing(For RB/FD/F


Cable Plug Mechanical and DI2(2 in 1)

G rade Available A:850g(For Size 53/BB86)

B:990g(For Size 53/BB86)

Tire Max 700*28C

O.L.D QR 130mm

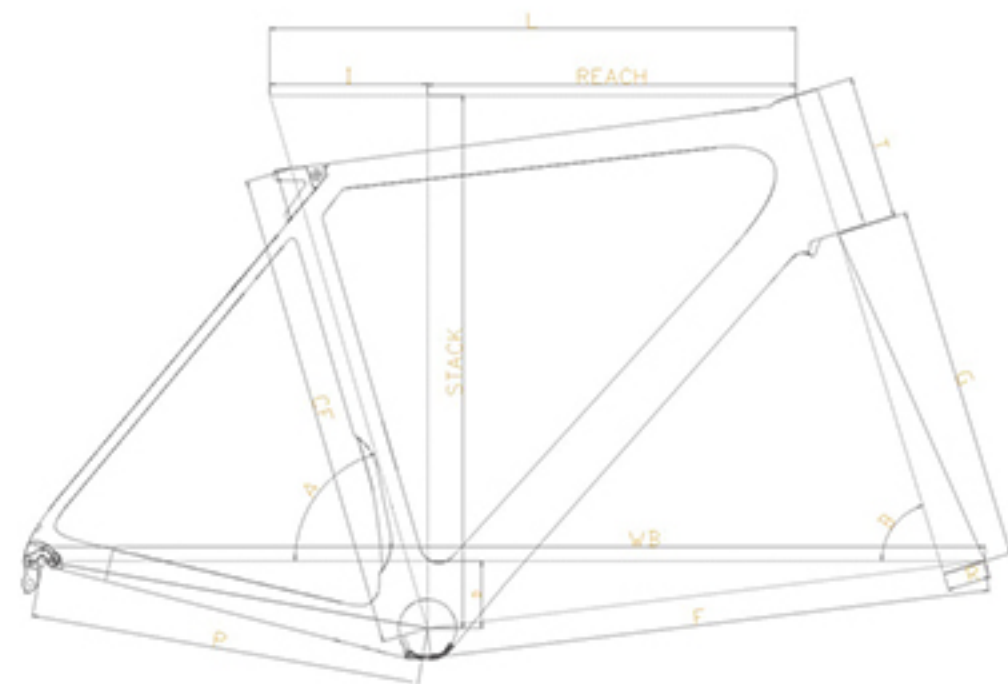


R01

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
490	460	522	148	74°	71.5°	574.5	408	110	72	45	371	514.8	374	971.6
510	480	536	157.2	73.7°	72.2°	580	408	130	72	45	371	536.2	378.8	977.1
530	500	548.5	164.5	73.5°	72.8°	585.5	408	150	70	45	371	555.3	384	983.3
550	520	560	170.4	73.5°	73°	595.3	408	170	70	45	371	575.2	389.6	993.1
570	540	576	179.6	73.2°	73.2°	605.9	408	195	70	45	371	595	396.4	1003.8

R02

Full Carbon Monocoque Frame

Size Available	48/51/54/57/60
Head Tube	1 1/8"-1 1/2"
Seat Post	Ø31.6mm
Bottom Bracket	BSA BB30 BB92 BB86
Cable Routing	Internal Cable Routing(For RB/FD/RI
Cable Plug	Mechanical and DI2(2 in 1)
Grade Available	A:930g(For Size 54/BSA) B:1030g(For Size 54/BSA)
Tire Max	700*25C
O.L.D	QR 130mm

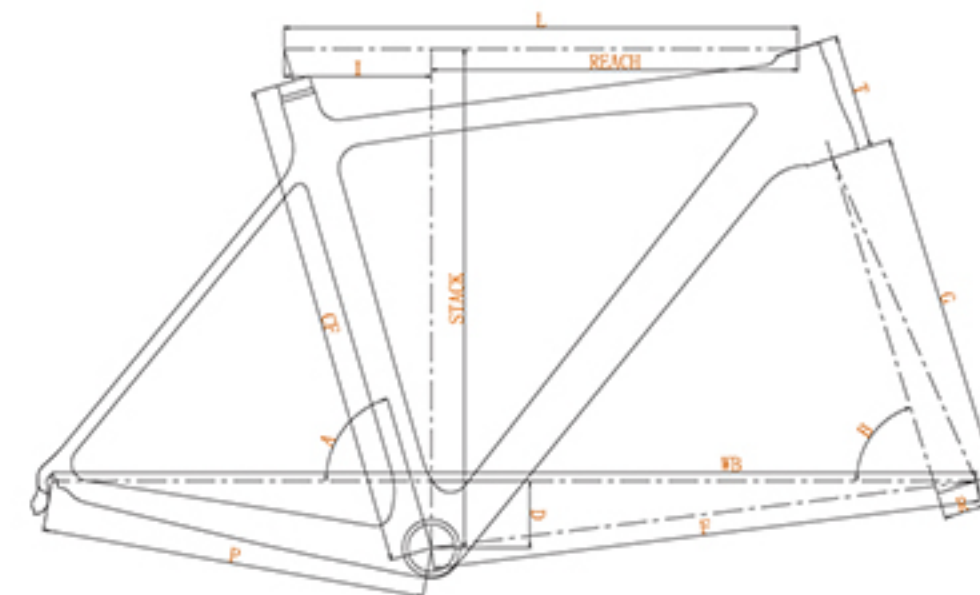


R02

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
480	480	525	141.6	74.5°	72.5°	571.2	405	105	72.5	43	368	510.7	383.4	965.1
510	510	540	154.8	73.5°	72.5°	577.2	405	120	72.5	43	368	522.5	385.2	971.9
540	540	550	165.2	73.5°	73°	583.1	405	155	72.5	43	368	557.6	384.8	977.8
570	570	565	179.9	73°	73°	593.2	405	190	72.5	43	368	588.6	385.1	991.7
600	600	580	187.2	73°	73°	608.1	405	215	72.5	43	368	612.5	392.8	1006.1

R03

Full Carbon Monocoque Frame

Size Available	48/51/54/57/60
Head Tube	1 1/8"-1 1/2"
Seat Post	Ø31.6mm
Bottom Bracket	BSA BB30 BB86
Cable Routing	1.Internal Cable Routing(For RB/FD/RD) 2.Internal Cable Routing(For FD/RD), Dut Routing(For RB)
Cable Plug	Mechanical and DI2(2 in 1)
Grade Available	B:1060g(For Size 54/BSA)
Tire Max	700*25C
O.L.D	QR 135mm or TA Ø12*142mm

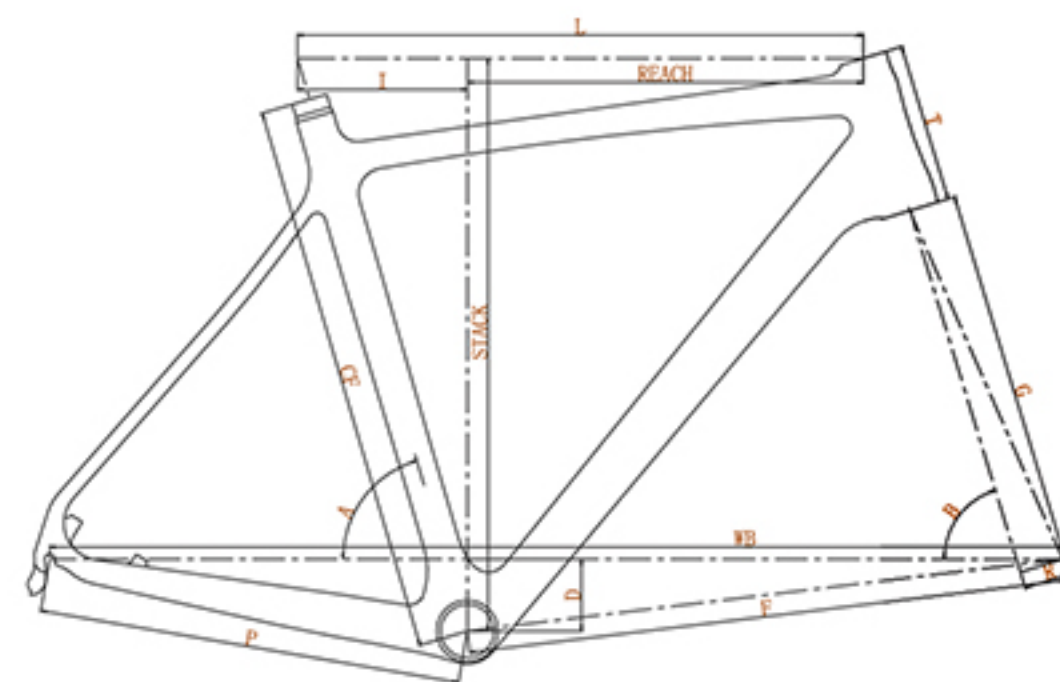**R03**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
480	480	525	141.6	74.5°	72.5°	571.2	412	105	72.5	43	368	510.7	383.4	972.2
510	510	540	154.8	73.5°	72.5°	577.2	412	120	70	43	368	522.5	385.2	979
540	540	550	165.2	73.5°	73°	583.1	412	155	70	43	368	557.6	384.8	984.9
570	570	565	179.9	73°	73°	593.2	412	190	67.5	43	368	588.6	385.1	995.8
600	600	580	187.2	73°	73°	608.1	412	215	67.5	43	368	612.5	392.8	1010.8

R04

Full Carbon Monocoque Frame

Size Available 45/48/50/52/54/56/58 cm

Head Tube 1 1/8"-1 1/2"

Seat Post SP05

Bottom Bracket BSA BB86 PF30 BB30

Cable Routing Internal Cable Routing(For RB/FD/RD


Cable Plug Mechanical and DI2(2 in 1)

Grade Available A:930g(For Size 54/BB86)

B:1030g(For Size 54/BB86)

Tire Max 700*25C

O.L.D QR 130mm

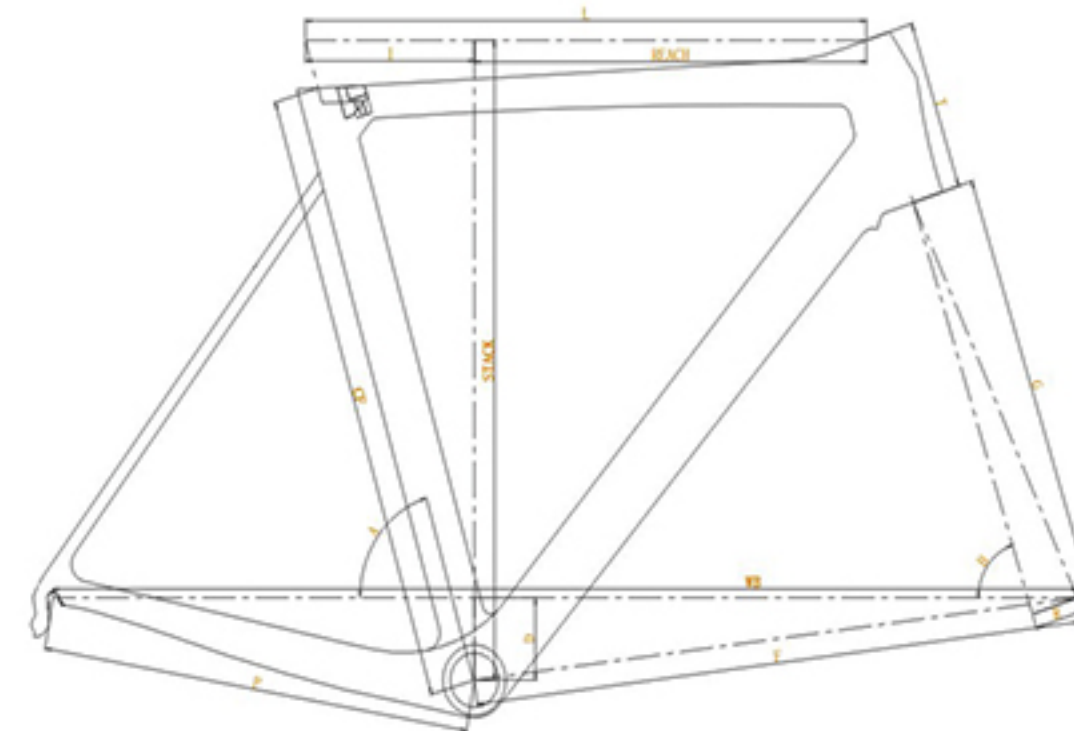

R04

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
450	450	495	139.8	74.8°	71.5°	555.2	408	110	72	45	368	511	356	952.1
480	480	515	141.7	74.8°	71.3°	578.1	408	125	69	45	368	521.5	373.3	976.1
500	500	525	151	74.3°	72°	577.1	408	135	69	45	368	533.5	374.8	975.1
520	520	535	161.1	73.5°	72°	579.4	408	145	70	45	368	544	373.9	977.3
540	540	550	171	73°	72.3°	586.6	408	160	70	45	368	559.3	379	984.5
560	560	560	179.4	72.5°	72.3°	591.2	408	170	70	45	368	568.9	380.6	989.2
580	580	570	186.2	72.5°	73°	594.1	408	190	70	45	368	590.5	383.8	992.1

R05**Full Carbon Monocoque Frame**

Size Available 45/48/50/52/54/56/58 cm

Head Tube 1 1/8"-1 1/2"

Seat Post SP05

Bottom Bracket BSA BB86 PF30 BB30


Cable Routing Internal Cable Routing(For RB/FD/RD)

Cable Plug Mechanical and DI2(2 in 1)

Grade Available B:1060g(For Size 54/BB86)

Tire Max 700*25C

O.L.D TA Ø12*142mm

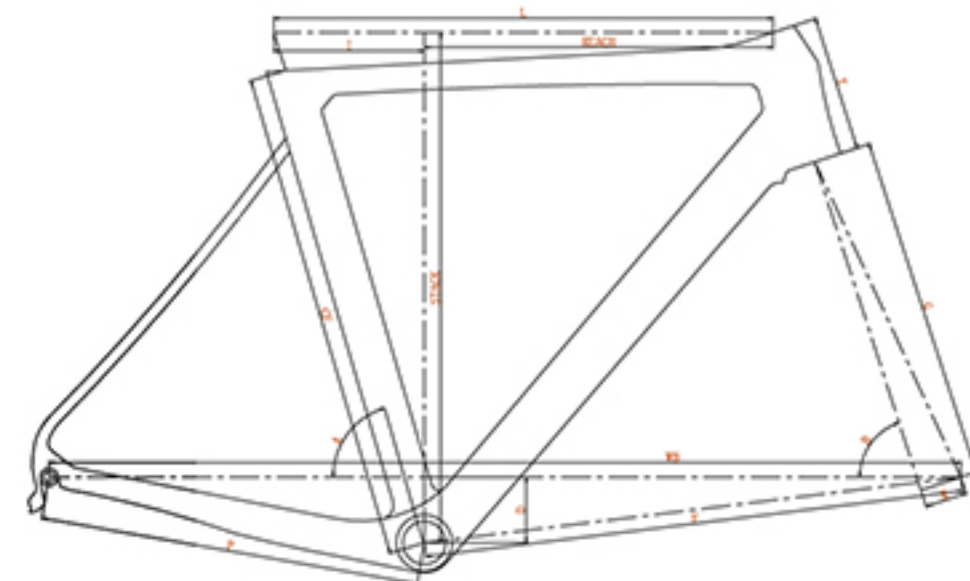
**R05**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
450	450	495	139.8	74.8°	71.5°	555.2	408	110	72	45	368	511	356	952.1
480	480	515	141.7	74.8°	71.5°	578.1	408	125	69	45	368	521.5	373.3	976.1
500	505	525	151	74.3°	72°	577.1	408	135	69	45	368	533.5	374.8	975.1
520	525	535	161.1	73.5°	72°	579.4	408	145	70	45	368	544	373.9	977.3
540	545	550	171	73°	72.3°	586.6	408	160	70	45	368	559.3	379	984.5
560	565	560	179.4	72.5°	72.3°	591.2	408	170	70	45	368	568.9	380.6	989.2
580	585	570	186.2	72.5°	73°	594.1	408	190	70	45	368	590.5	383.8	992.1

R06

Full Carbon Monocoque Frame

Size Available	470/490/510/530/550/570
Head Tube	1 1/8"-1 1/2"
Seat Post	Sp062
Bottom Bracket	BB86.5
Cable Routing	Internal cable Routing(For RB/FD/RD)
Cable Plug	Mechanical and D12(2 in 1)
Grade Available	B:1190g(For Size 530/BB86)
Tire Max	700"*37C
O.L.D	Axle $\Phi 12 \times 142\text{mm}$
Disc brake	Flat mount

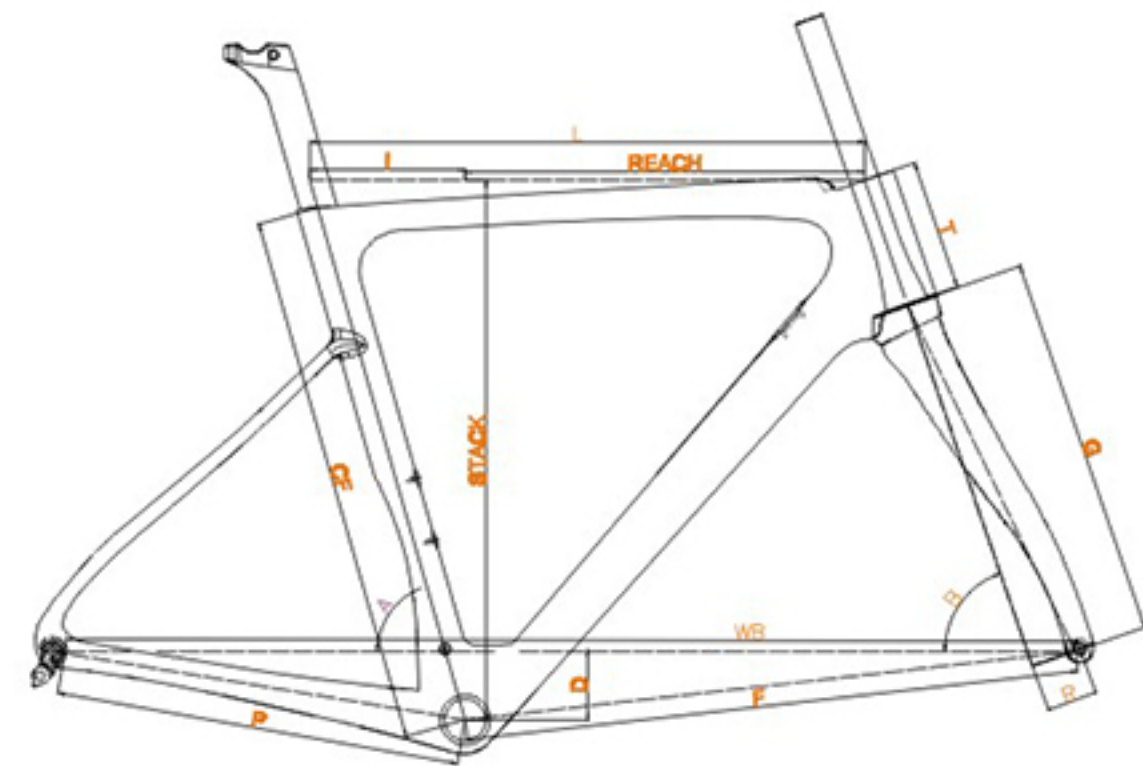


R06

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	470	505	140.1	74.5°	71.5°	563.3	415	95	68	50	380	505.1	365.2	968.3
490	490	515	142.7	74.5°	71.5°	573	415	105	68	50	380	514.6	372.1	978.4
510	510	530	148	74°	71°	589.2	415	108.5	68	50	380	516.2	383.3	994.6
530	530	550	153.8	74°	71°	608.9	415	130	68	50	380	536.5	396.2	1014.5
550	550	565	161.2	73.5°	70.5°	623.7	415	140	68	50	380	544.1	403.6	1029.4
570	570	580	169.2	73°	70.5°	634	415	150	68	50	380	553.5	410.6	1039.7

R07

Full Carbon Monocoque Frame

Size Available	46/49/52/54/56/58
Head Tube	1 1/8"-1 1/2"
Seat Post	SP063
Bottom Bracket	BSA BB86
Cable Routing	Internal Cable Routing(For RB/FD/RD)
Cable Plug	Mechanical and DI2(2 in 1)
Grade Available	B:1080g(For Size 54/BB86)
Tire Max	700*28C
O.L.D	QR 130mm
Brake-R	Shimano BR-9010-RS/ BR-6810-RS/BR-5810-RS

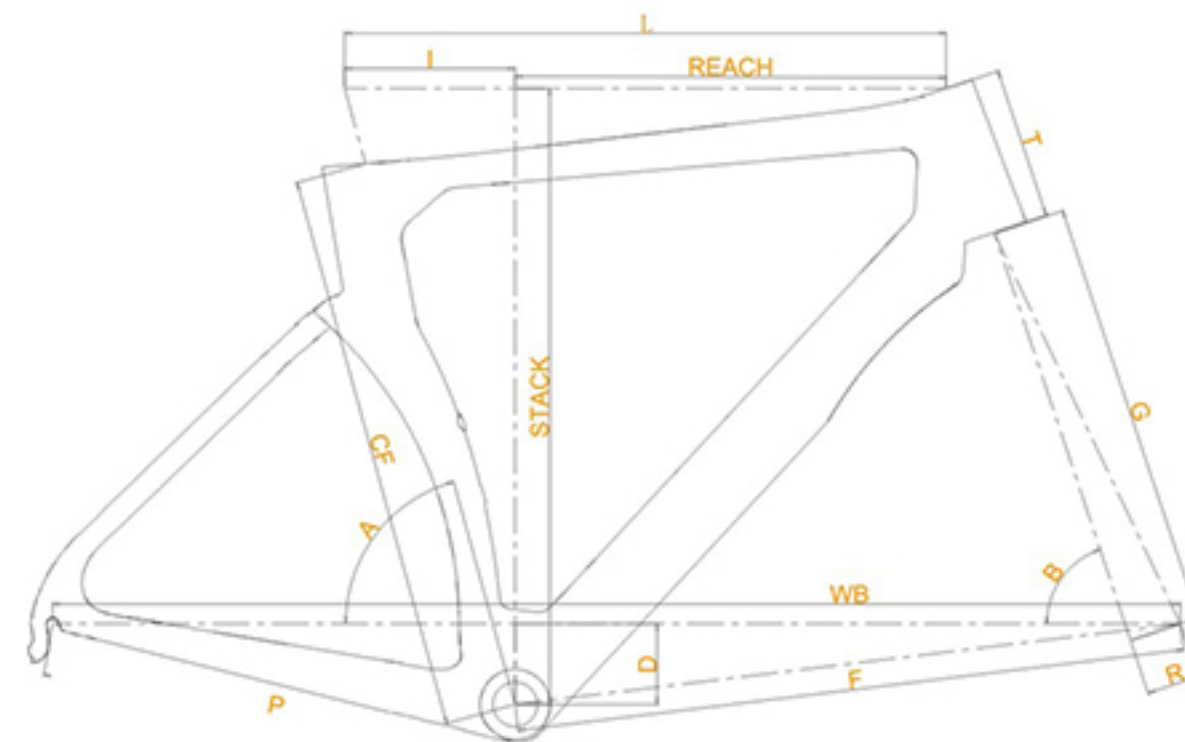


R07

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
460	460	495	137.2	75°	71.5°	558	402	115	69	45	367	512.8	357.8	949.7
490	480	515	146	74.5°	71.5°	573.9	402	130	69	45	367	527	369	965.7
520	500	525	147.8	74.5°	72°	579.6	402	135	69	45	367	533.5	377.2	971.5
540	520	535	154.7	74°	72.5°	580.1	402	140	69	45	367	540	380.3	972.1
560	540	545	165.9	73.5°	73°	580.6	402	160	69	45	367	560.8	379.1	972.5
580	560	560	171.6	73.5°	73°	595.7	402	180	69	45	367	579.9	388.4	987.7

TB01

Full Carbon Monocoque Frame

Size Available	46/49/52/54/56 cm
Head Tube	1 1/8"
Seat Post	SP06
Bottom Bracket	BSA BB86
Cable Routing	Internal Cable Routing(For RB/FD/RD)
Cable Plug	Mechanical and DI2(2 in 1)
Grade Available	B:1300g(For Size 52/BSA)
Brake-R	KEKTRD-T741R Shimano-9100-R/6810-R/5710-R
Tire Max	700*25C
O.L.D	QR 130mm

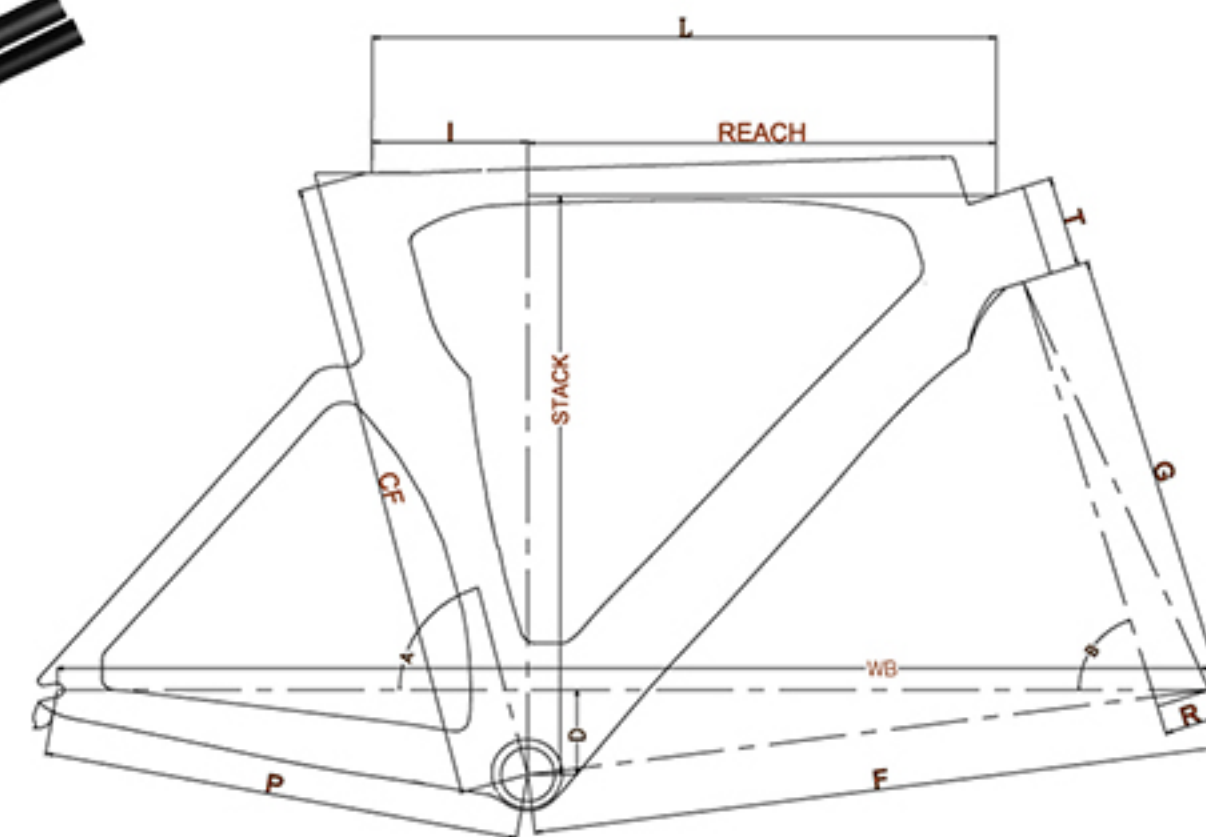

TB01

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
460	460	495	125.8	75°	71°	558.7	395	70	70	45	368	469.4	369.2	950.3
490	515	515	128.3	75°	72.5°	567.4	395	75	70	45	368	478.9	386.9	951.7
520	535	530	134.6	75°	72.5°	582.3	395	82	70	45	368	502.3	399.9	966.9
540	555	550	135.2	75°	72.5°	603	395	102	70	45	368	504.5	414.7	987.7
560	575	570	140.3	75°	72.5°	623.9	395	122	70	45	368	523.7	429.7	1008.7

MB01**Full Carbon Monocoque Frame**

Size Available	15"/17"/19"
Head Tube	1 1/8"-1 1/2"
Seat Post	Ø31.6mm
Bottom Bracket	BSA BB92
Cable Routing	1.Internal Cable Routing(For RB/FD/RD) 2.Internal Cable Routing(For FD/RD), Dut Routing(For RB)
Grade Available	B:1150g(For Size 17"/BB92)
Tire Max	29"*2.35"
O.L.D	Ø12*142mm and Axle Ø12*148mm

**MB01**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
15	380	555	181.3	73°	71°	610	445	110	40	42	490	593.7	373.7	1051.9
17	432	575	181.3	73°	71°	630	445	110	40	42	490	593.7	393.7	1071.9
19	480	610	182.7	73°	71°	665.1	445	115	40	42	490	598.4	427.3	1107.1

MB02**Full Carbon Monocoque Frame**

Size Available 16"/18"/20"

Head Tube 1 1/8"-1 1/2"

Seat Post Ø31.6mm


Bottom Bracket BSA BB92 PF30

Cable Routing 1.Internal Cable Routing(For RB/FD/RD)
 2.Internal Cable Routing(For FD/RD),
 Dut Routing(For RB)

Grade Available B:1150g(For Size 16"/BB92)

Tire Max 29"*2.35"

O.L.D Axle Ø12*142 and Axle Ø12*148mm

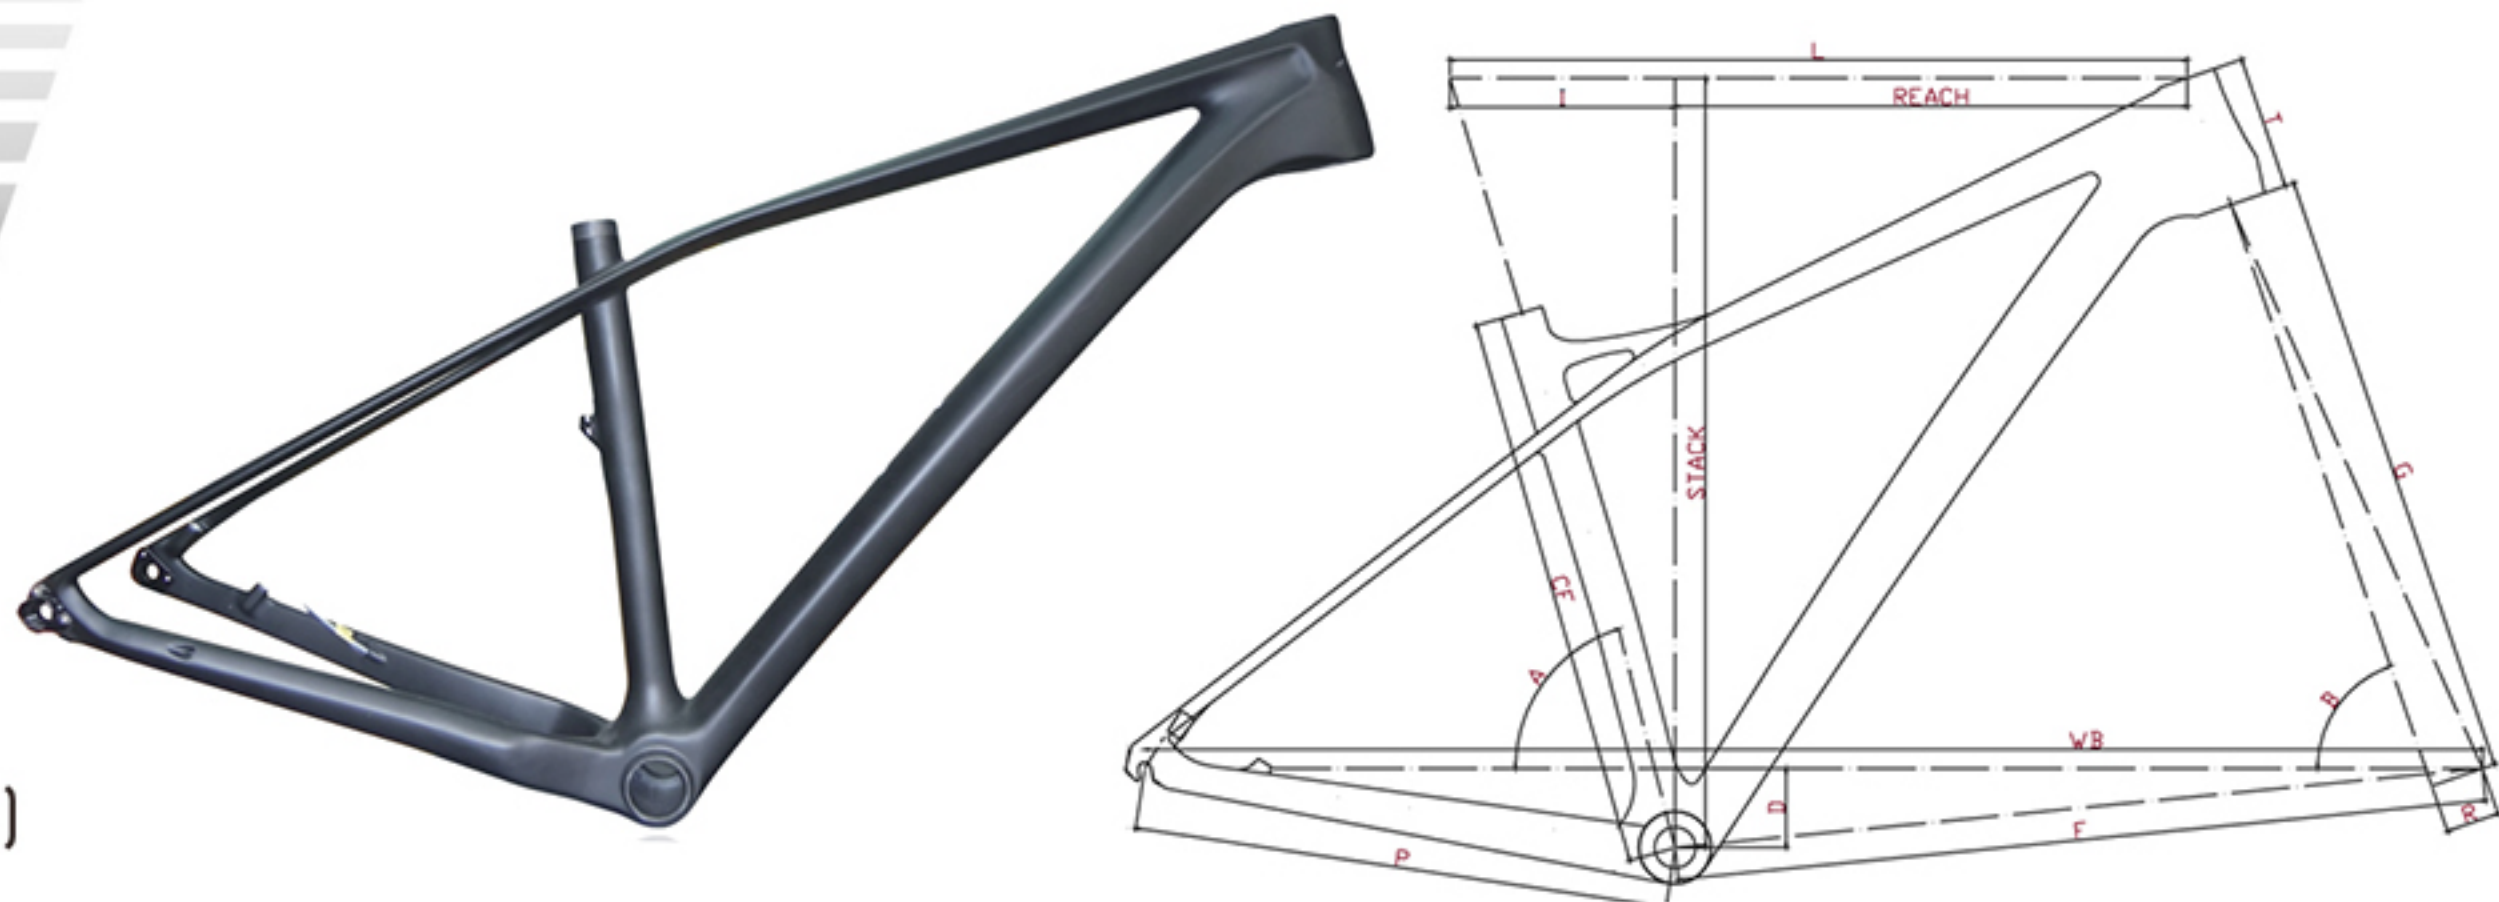
**MB02**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
16	406	578	183.5	73°	70°	649.8	440	110	65	44	505	627.6	394.5	1081.8
18	457	605	184.8	73°	71°	665.6	440	110	65	44	505	632	420.2	1097.6
20	508	620	187.7	73°	71°	680.9	440	120	65	44	505	641.4	432.3	1112.9

MB03

Full Carbon Monocoque Frame

Size Available	15"/17"/19"
Head Tube	1 1/8"-1 1/2"
Seat Post	Ø31.6mm
Bottom Bracket	BSA(100mm BB shells)
Cable Routing	Internal Cable Routing(For RB/FD/RD)
Grade Available	B:1500g(For Size 17"/BSA)
Tire Max	26"*4.8"
O.L.D	TA Ø12*197mm

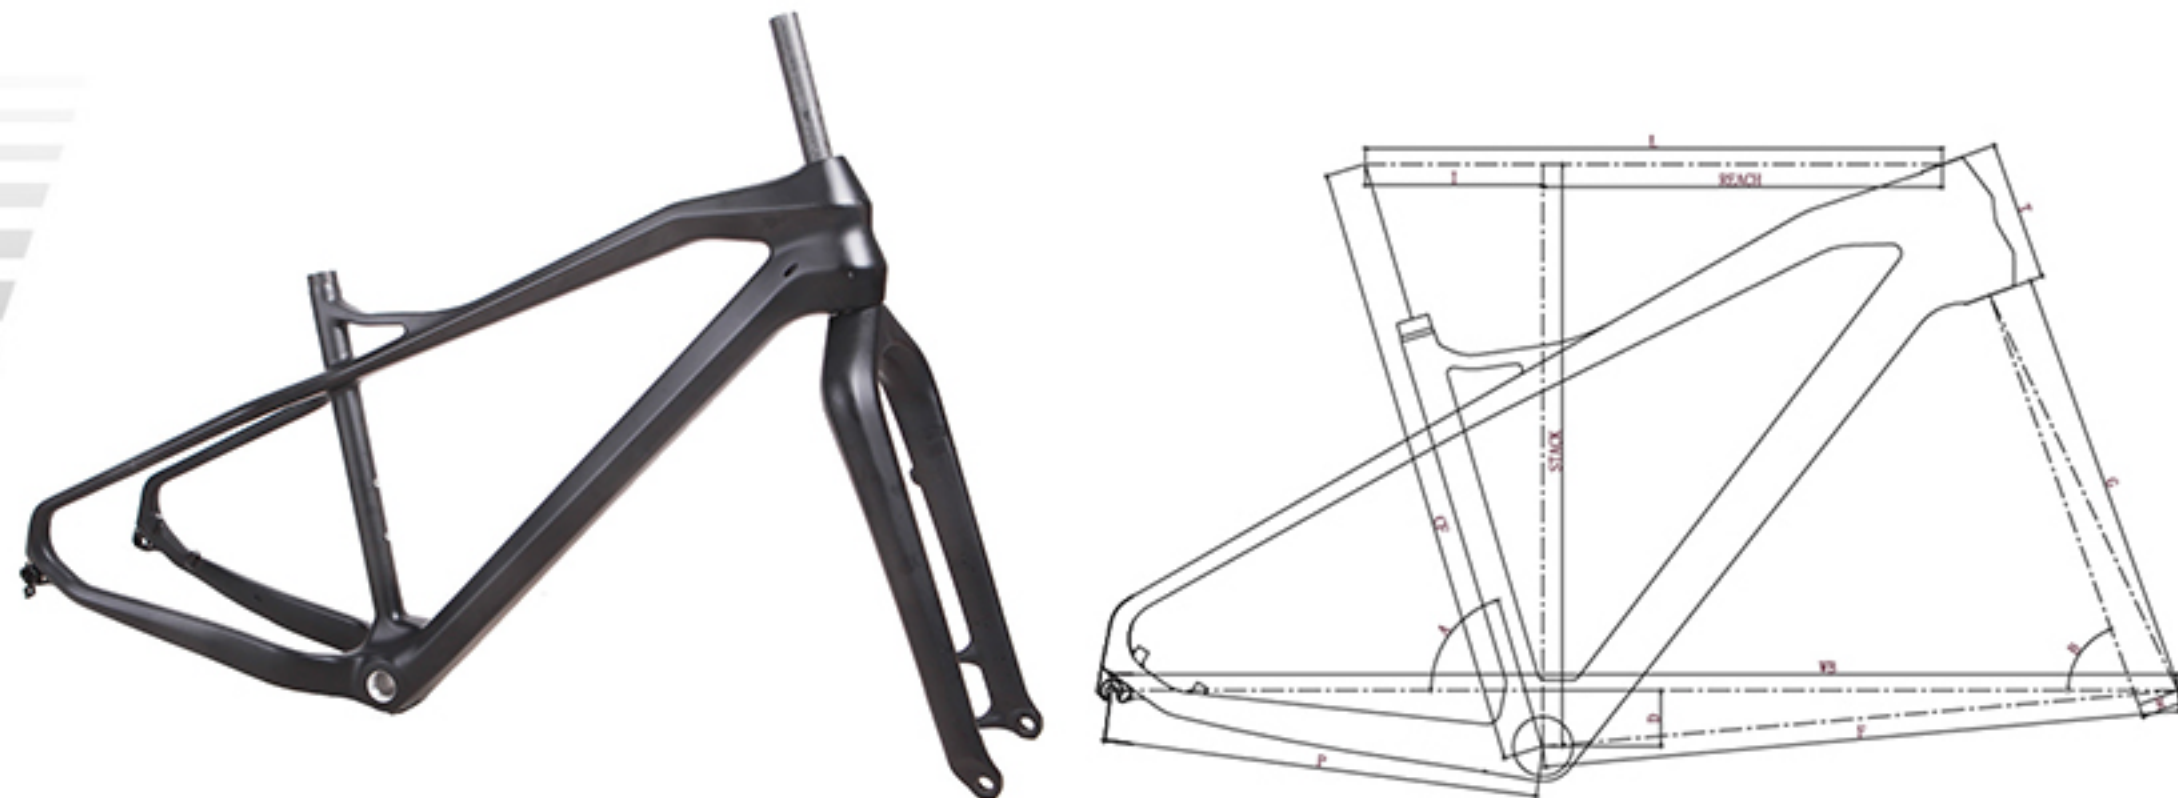


● **MB03**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
15	380	580	177.9	73°	70°	643.2	468	110	60	45	468	587.8	400.5	1104.6
17	430	600	186.7	73°	70°	664.5	468	135	60	45	468	611.3	413.3	1125.9
19	480	620	191	73°	70°	685.2	468	150	60	45	468	625.4	429	1146.8

MB04**Full Carbon Monocoque Frame**


Size Available	15"/17"/19"
Head Tube	1 1/8"-1 1/2"
Seat Post	Ø31.6mm
Bottom Bracket	BB92 PF30
Cable Routing	Internal Cable Routing(For RB/FD/
Grade Available	B:1350g(For Size 17"/BSA)
Tire Max	29"*3.0"
O.L.D	TA Ø12*148mm

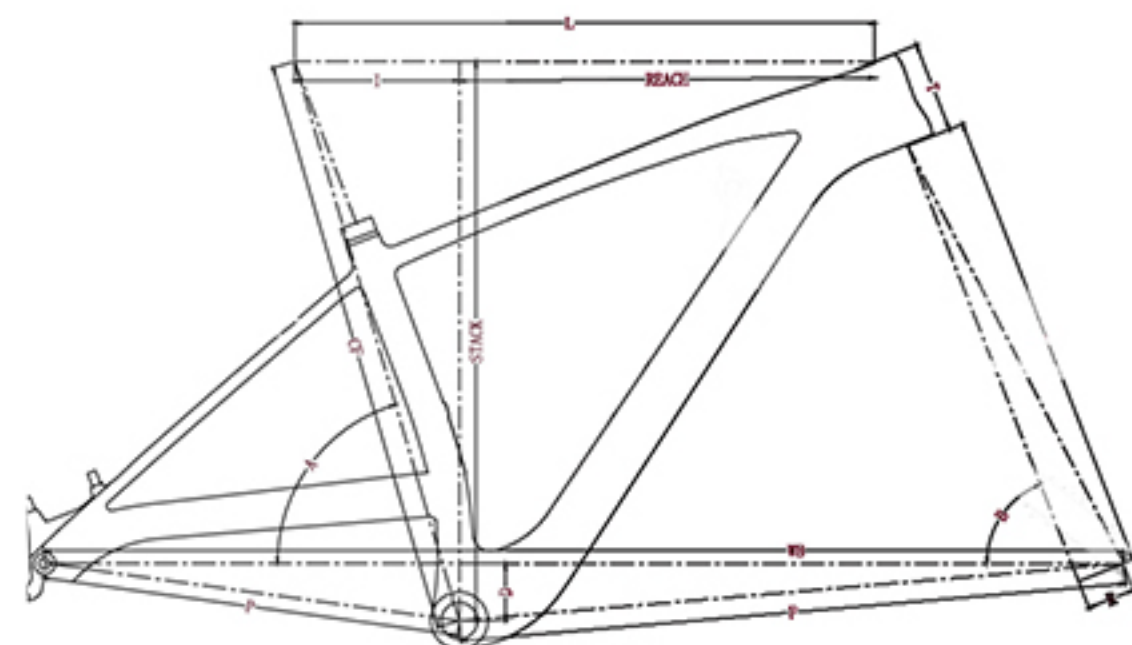**MB04**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
15	380	590	171.9	73.5°	68.5°	680.7	440	90	60	51	490	581	418.1	1113.9
17	430	610	173.3	73.5°	68.5°	701.1	440	95	60	51	490	585.6	436.7	1134.4
19	480	630	174.7	73.5°	68.5°	721.5	440	100	60	51	490	590.3	454.9	1154.8

MB05**Full Carbon Monocoque Frame**

Size Available	15"/17"/19"/20.5"
Head Tube	1 1/8"-1 1/2"
Seat Post	Ø31.6mm
Bottom Bracket	BB92
Cable Routing	Internal Cable Routing(For RB/FD/RD), F.D
	1. (M9020-E M8020-E) 2. (M9000-E M8000-E)
Grade Available	A:990g(For Size 17"/BB92) B:1090g(For Size 17"/BB92)
Travel	F 100mm R 110mm
Tire Max	29"*2.3"
O.L.D	Axle Ø12*148mm

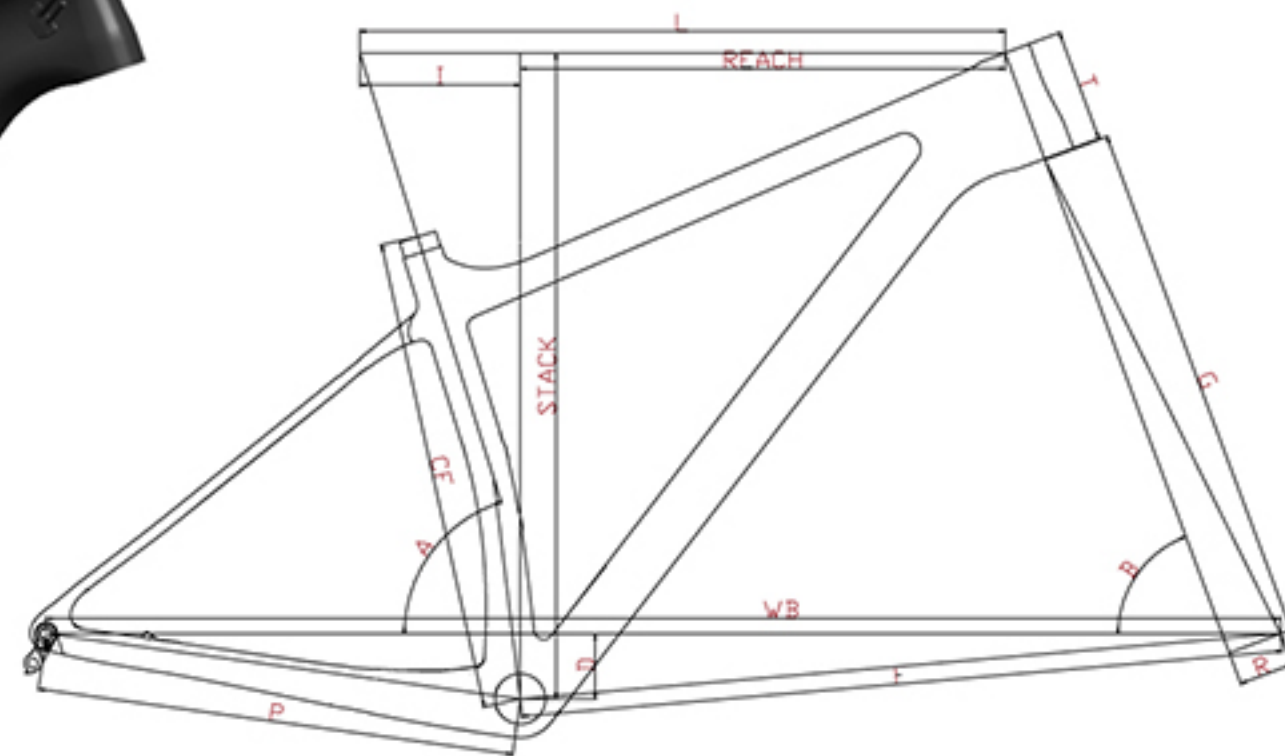
● **MB05**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
15	390	580	149.3	72.5°	69.5°	689.5	445	105	60	51	490	600.4	430.7	1127.7
17	440	600	149.3	72.5°	69.5°	709.5	445	105	60	51	490	600.4	450.7	1147.7
19	480	620	152.3	72.5°	69.5°	729.9	445	115	60	51	490	609.8	467.7	1168.2
20.5	530	640	155.2	72.5°	69.5°	750.4	445	125	60	51	490	619.1	484.4	1188.8

MBS01

Full Carbon Monocoque Frame

Size Available	15.5"/17.5"/19"/20.5"
Head Tube	1 1/8"-1 1/2"
Seat Post	Ø31.6mm
Bottom Bracket	BB92
Cable Routing	Internal Cable Routing(For RB/FD/RD)
Grade Available	B:2000g(For Size 17.5"/BB92)
Travel	F 100mm R 110mm
Tire Max	27.5"*2.35"
O.L.D	TA Ø12*142mm or Ø12*148mm

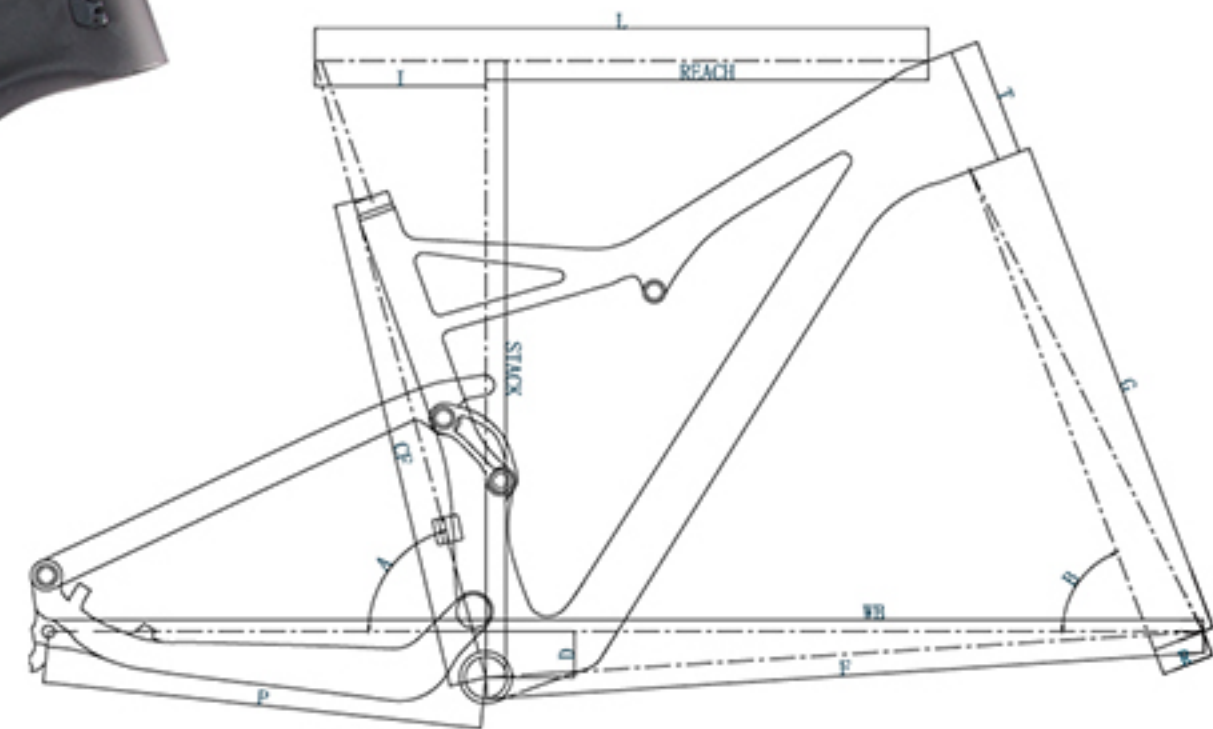


MBS01

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
15.5	395	558.2	162.6	74.5°	69°	659.4	430	95	45	51	502	584.8	395.6	1090.5
17.5	445.5	585	163.3	74.5°	69°	686.6	430	100	45	51	502	588.7	421.7	1117.7
19	483	600	167.1	74.5°	69°	703	430	115	45	51	502	602.7	432.9	1134.2
20.5	520	630	169.7	74.5°	69°	733.9	430	125	45	51	502	612.1	460.5	1165.2

MBS02**Full Carbon Monocoque Frame**


Size Available	15.5"/17.5"/19"/20.5"
Head Tube	1 1/8"-1 1/2"
Seat Post	Ø31.6mm
Bottom Bracket	BB92
Cable Routing	Internal Cable Routing(For RB/FD/RC)
Grade Available	B:2050g(For Size 17.5"/BB92)
Travel	F 100mm R 110mm
Tire Max	27.5"*3.0"
O.L.D	Axle Ø12*148mm

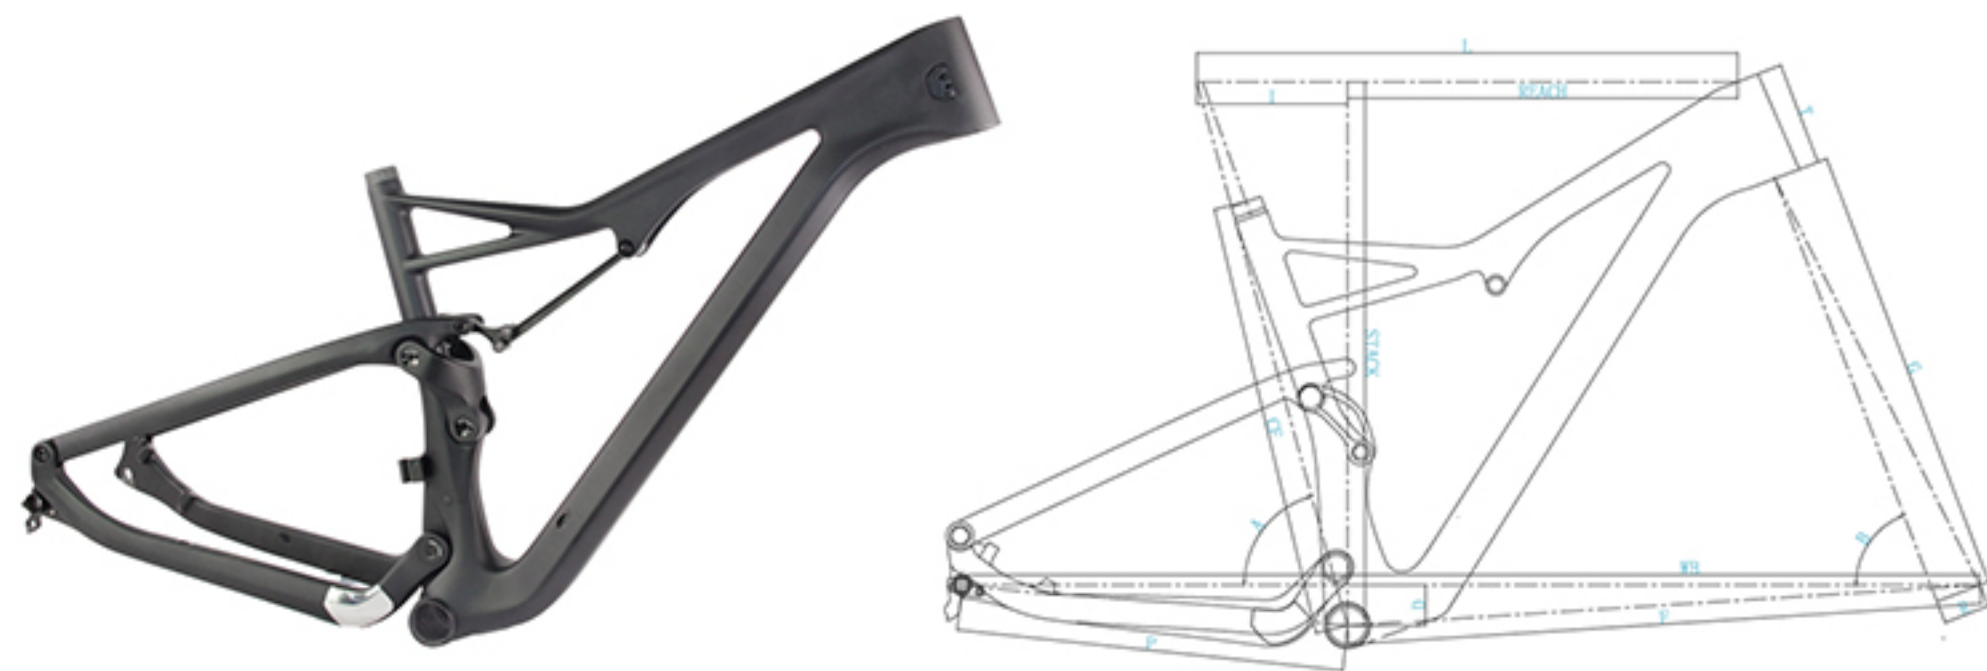● **MBS02**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
15.5	395	558.2	162.6	74.5°	69°	659.4	445	95	45	51	502	584.8	395.6	1100.6
17.5	445.5	585	163.3	74.5°	69°	686.6	445	100	45	51	502	588.7	421.7	1127.8
19	483	600	167.1	74.5°	69°	703	445	115	45	51	502	602.7	432.9	1144.3
20.5	520	630	169.7	74.5°	69°	733.9	445	125	45	51	502	612.1	460.5	1175.3

MBS03**Full Carbon Monocoque Frame**


Size Available	S/M/L/XL
Head Tube	FSA NO.ACB1 42(1 1/8"-1 1/2")
Seat Post	Ø31.6mm
Cable Routing	Internal Cable Routing
Travel	F 100mm R 103mm
Tire Max	29"*2.35"
O.L.D	Axle Ø12*148mm
Crankset	34T
REAR Shock	165*40 travel 100mm 165*45 travel 115mm
Crade Available	B:1950g(For Size 17"/BB92)

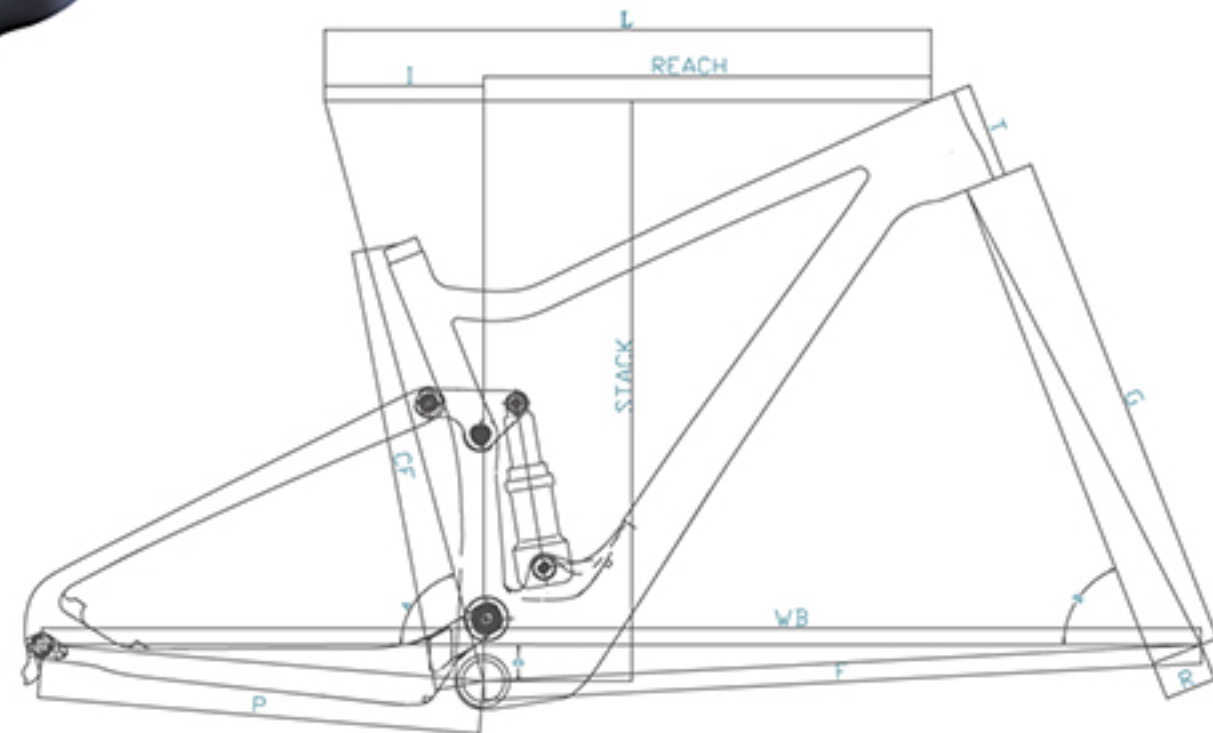● **MBS03**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
15.5	390	570	157.1	74.7°	68.5	680.4	438	95	36	51	502	573.6	412.9	1116
17.5	440	600	157.1	74.7°	68.5	710.4	438	95	36	51	502	573.6	442.9	1146
19	485	630	159.8	74.7°	68.5	741.3	438	105	36	51	502	582.9	470.2	1176.9
20.5	520	650	162.5	74.7°	68.5	762.2	438	115	36	51	502	592.2	487.5	1197.9

MBS04**Full Carbon Monocoque Frame**


Size Available	S/M/L/XL
Head Tube	FSA NO.ACB1 42(1 1/8"-1 1/2")
Seat Post	Ø31.6mm
Bottom Bracket	BB92
Cable Routing	Internal Cable Routing
Travel	F 120mm R 115mm
Tire Max	27.5+''*2.8''
O.L.D	Axle Ø12*148mm
Crankset	34T
REAR Shock	165*40 travel 100mm 165*45 travel 115mm
Crade Available	B:1950g(For Size 17''/BB ^c)

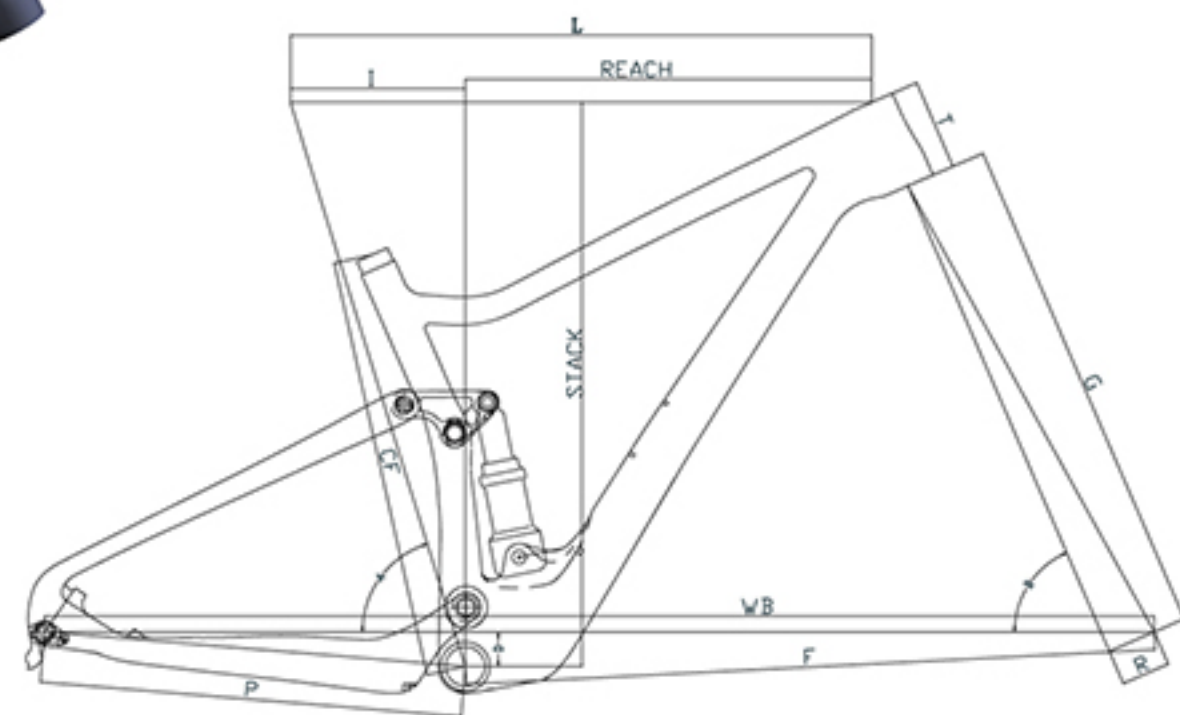**MBS04**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	410	575.5	181.9	72.8°	66.6	688.7	440	95	36	51	530	588	423.6	1126.2
M	440	605.8	182.2	72.8°	66.6	719	440	95	36	51	530	588	423.6	1156.6
L	490	636.1	185.1	72.8°	66.6	750.3	440	105	36	51	530	597.2	451	1188
XL	540	656.3	187.9	72.8°	66.6	771.6	440	115	36	51	530	606.4	468.4	1209.3

MBS04**Full Carbon Monocoque Frame**


Size Available	S/M/L/XL
Head Tube	FSA NO.ACB1 42(1 1/8"-1 1/2")
Seat Post	Ø31.6mm
Bottom Bracket	BB92
Cable Routing	Internal Cable Routing
Travel	F 120mm R 115mm
Tire Max	27.5+''*2.8''
O.L.D	Axle Ø12*148mm
Crankset	34T
REAR Shock	165*40 travel 100mm 165*45 travel 115mm
Crade Available	B:1950g(For Size 17''/BB ^c)

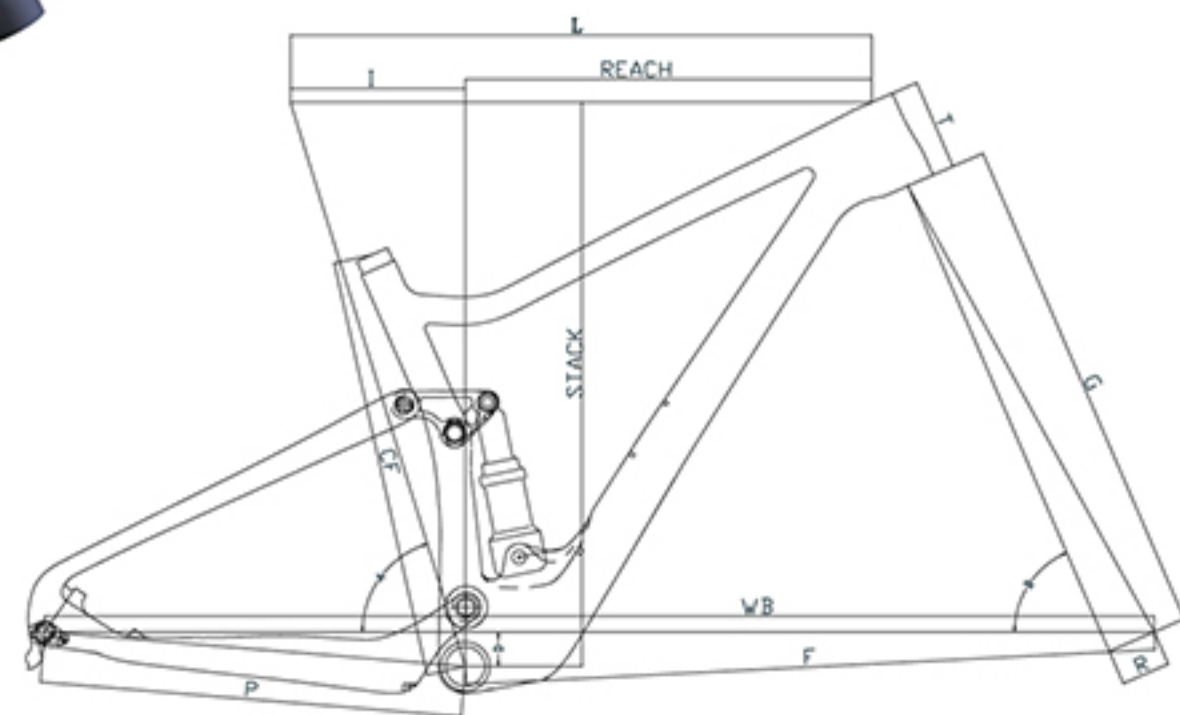**MBS04**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	410	575.5	181.9	72.8°	66.6	688.7	440	95	36	51	530	588	423.6	1126.2
M	440	605.8	182.2	72.8°	66.6	719	440	95	36	51	530	588	423.6	1156.6
L	490	636.1	185.1	72.8°	66.6	750.3	440	105	36	51	530	597.2	451	1188
XL	540	656.3	187.9	72.8°	66.6	771.6	440	115	36	51	530	606.4	468.4	1209.3

GB01**Full Carbon Monocoque Frame**

Size Available	490/520/540/560/580
Head Tube	1 1/8"-1 1/2"
Seat Post	Ø27.2mm
Bottom Bracket	BSA BB86
Cable Routing	Internal Cable Routing(For RB/FD/RD)
Cable Plug	Mechanical and DI2(2 in 1)
Grade Available	B:1080g(For Size 54/BB86)
Tire Max	700*41C
O.L.D	Axle Ø12*142mm

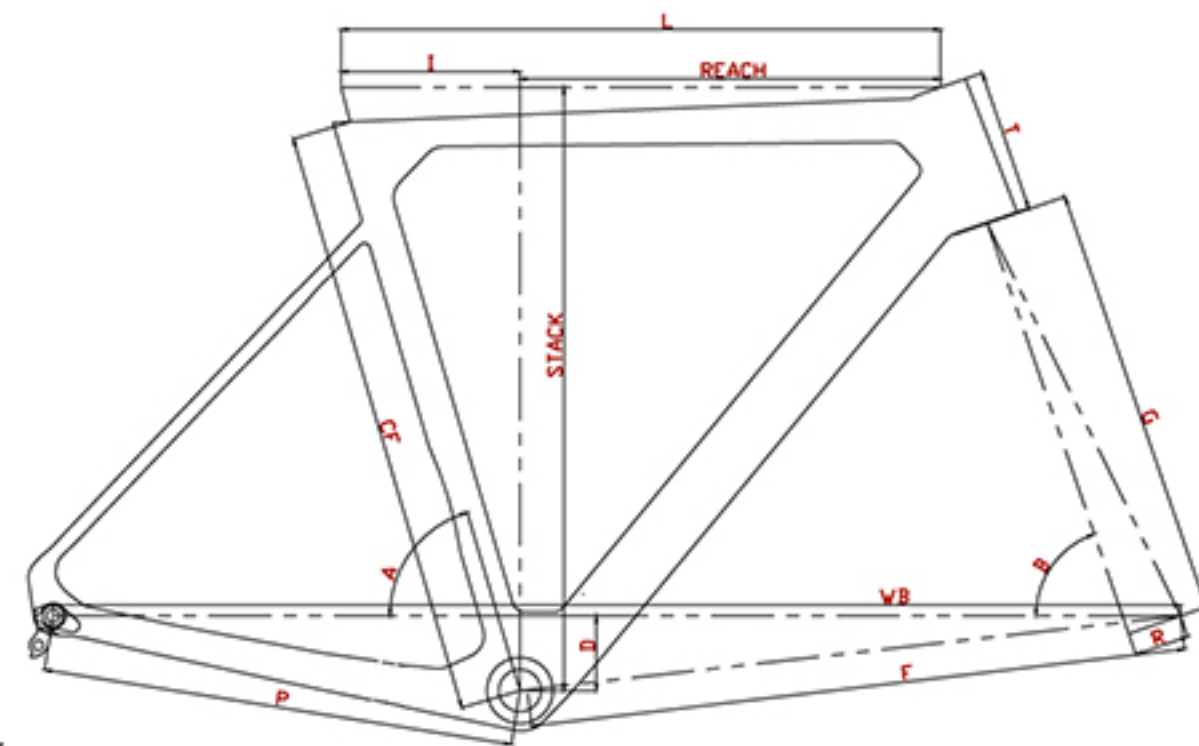
**GB01**

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
490	440	510	140.3	75°	70°	592.2	430	105	70	50	395	523.7	369.7	1012.3
520	460	525	147.1	74.5°	70.5°	598.1	430	110	70	50	395	530.3	377.9	1018.2
540	480	545	162.6	73.5°	71°	604.7	430	130	68	50	395	549.1	382.4	1025.5
560	500	565	174.8	73°	72°	610.3	430	150	68	50	395	571.8	390.2	1031
580	520	575	189.9	72.5°	72.5°	609.8	430	180	68	50	395	602.3	385.1	1030.6

EBM01

Full Carbon Hardtail EBIKE

Size Available	15/17/19
Head Tube	FSA NO.57
Seat Post	Ø31.6mm
Cable Routing	Internal Cable Routing
Travel	F 100mm
Tire Max	29"*2.35" 27.5"*3.0"
O.L.D	Axle Ø12*148mm
BATTERIE	Shimano E8010
DISPLAY	Shimano ANTRIEBSEINHEIT DU-E800
Crankset	FC-E8000 SM-CRE80 34T
Grade Available	B:1680g(For Size 17)

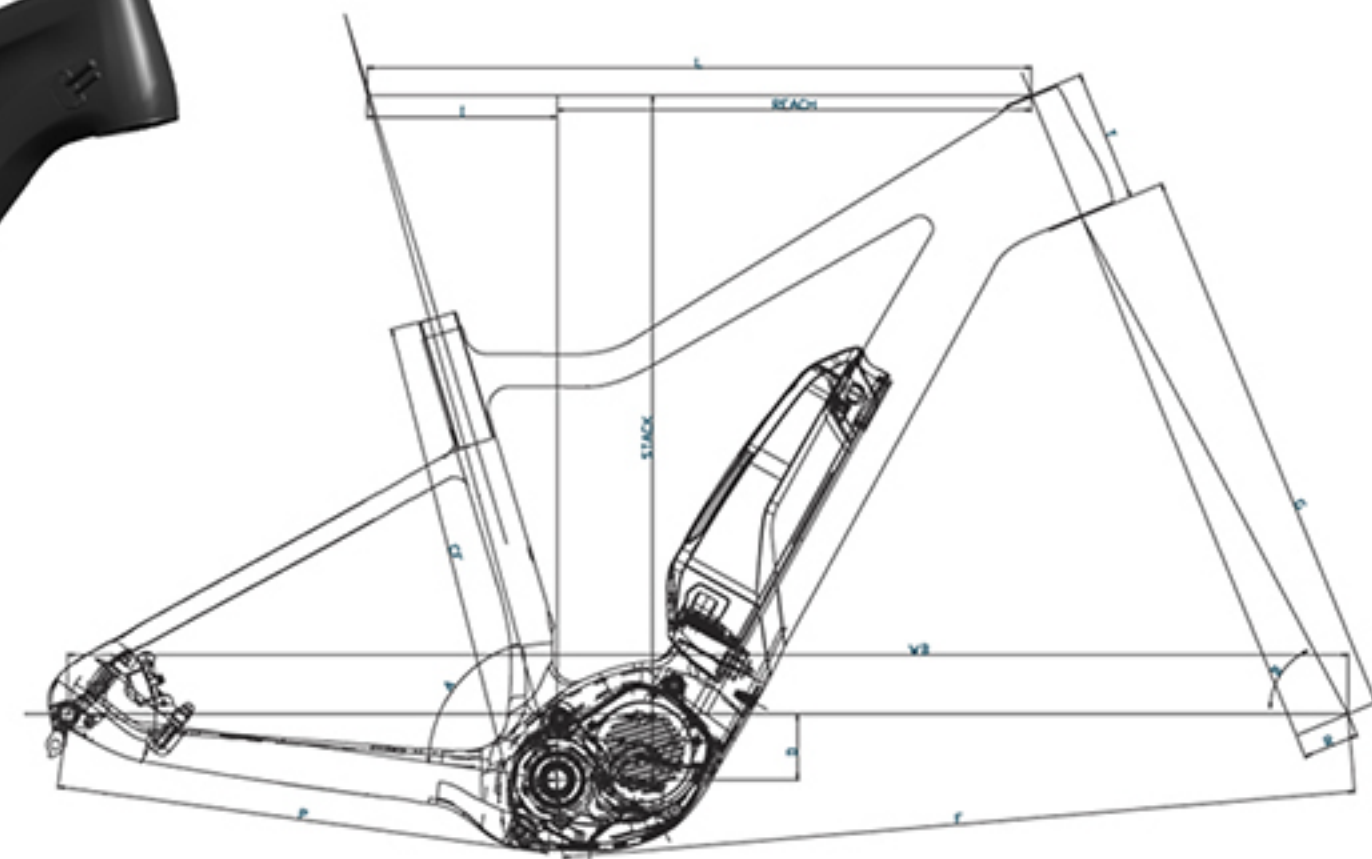

EBM01

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
15	380	580	170.2	74.5°	67.5°	697.2	450	110	60	51	511	511	409.8	1140.6
17	435	605	172.9	74.5°	67.5°	723.2	450	120	60	51	511	511	432.1	1166.7
19	485	625	175.5	74.5°	67.5°	744.3	450	130	60	51	511	511	449.5	1187.9